

---

# **drf-yasg Documentation**

***Release 1.20.4.dev2+g78031f0***

**Cristi V.**

**Jul 20, 2023**



---

## Table of contents:

---

<b>1</b>	<b>drf-yasg - Yet another Swagger generator</b>	<b>1</b>
1.1	OpenAPI 3.0 note . . . . .	1
1.2	Features . . . . .	2
1.3	Table of contents . . . . .	2
1.4	Usage . . . . .	4
1.5	Third-party integrations . . . . .	8
<b>2</b>	<b>Serving the schema</b>	<b>11</b>
2.1	get_schema_view and the SchemaView class . . . . .	11
2.2	Renderers and codecs . . . . .	11
2.3	Management command . . . . .	11
<b>3</b>	<b>Functional overview</b>	<b>13</b>
3.1	OpenAPI specification overview . . . . .	13
3.2	Default behavior . . . . .	14
3.3	A note on limitations . . . . .	16
<b>4</b>	<b>Describing authentication schemes</b>	<b>17</b>
4.1	Security definitions . . . . .	17
4.2	Security requirements . . . . .	17
4.3	swagger-ui as OAuth2 client . . . . .	18
<b>5</b>	<b>Custom schema generation</b>	<b>19</b>
5.1	Excluding endpoints . . . . .	19
5.2	The @swagger_auto_schema decorator . . . . .	19
5.3	Support for SerializerMethodField . . . . .	22
5.4	Serializer Meta nested class . . . . .	22
5.5	Subclassing and extending . . . . .	24
<b>6</b>	<b>Customizing the web UI</b>	<b>27</b>
<b>7</b>	<b>Settings</b>	<b>29</b>
7.1	SWAGGER_SETTINGS . . . . .	30
7.2	REDOC_SETTINGS . . . . .	35
<b>8</b>	<b>Contributing</b>	<b>37</b>
8.1	Issues . . . . .	37

8.2	Pull requests . . . . .	37
8.3	Maintainer's notes . . . . .	38
<b>9</b>	<b>License</b>	<b>41</b>
9.1	BSD 3-Clause License . . . . .	41
<b>10</b>	<b>Changelog</b>	<b>43</b>
10.1	<b>1.21.7</b> . . . . .	43
10.2	<b>1.21.6</b> . . . . .	43
10.3	<b>1.21.5</b> . . . . .	43
10.4	<b>1.21.4</b> . . . . .	43
10.5	<b>1.21.3</b> . . . . .	44
10.6	<b>1.21.2</b> . . . . .	44
10.7	<b>1.21.1</b> . . . . .	44
10.8	<b>1.21.0</b> . . . . .	44
10.9	<b>1.20.3</b> . . . . .	44
10.10	<b>1.20.0</b> . . . . .	44
10.11	<b>1.17.1</b> . . . . .	45
10.12	<b>1.17.0</b> . . . . .	45
10.13	<b>1.16.1</b> . . . . .	45
10.14	<b>1.16.0</b> . . . . .	45
10.15	<b>1.15.1</b> . . . . .	46
10.16	<b>1.15.0</b> . . . . .	46
10.17	<b>1.14.0</b> . . . . .	46
10.18	<b>1.13.0</b> . . . . .	46
10.19	<b>1.12.1</b> . . . . .	47
10.20	<b>1.12.0</b> . . . . .	47
10.21	<b>1.11.1</b> . . . . .	48
10.22	<b>1.11.0</b> . . . . .	48
10.23	<b>1.10.2</b> . . . . .	48
10.24	<b>1.10.1</b> . . . . .	49
10.25	<b>1.10.0</b> . . . . .	49
10.26	<b>1.9.2</b> . . . . .	49
10.27	<b>1.9.1</b> . . . . .	50
10.28	<b>1.9.0</b> . . . . .	50
10.29	<b>1.8.0</b> . . . . .	50
10.30	<b>1.7.4</b> . . . . .	51
10.31	<b>1.7.3</b> . . . . .	51
10.32	<b>1.7.2</b> . . . . .	51
10.33	<b>1.7.1</b> . . . . .	51
10.34	<b>1.7.0</b> . . . . .	51
10.35	<b>1.6.2</b> . . . . .	52
10.36	<b>1.6.1</b> . . . . .	52
10.37	<b>1.6.0</b> . . . . .	52
10.38	<b>1.5.1</b> . . . . .	52
10.39	<b>1.5.0</b> . . . . .	52
10.40	<b>1.4.7</b> . . . . .	52
10.41	<b>1.4.6</b> . . . . .	53
10.42	<b>1.4.5</b> . . . . .	53
10.43	<b>1.4.4</b> . . . . .	53
10.44	<b>1.4.3</b> . . . . .	53
10.45	<b>1.4.2</b> . . . . .	53
10.46	<b>1.4.1</b> . . . . .	53
10.47	<b>1.4.0</b> . . . . .	54

10.48	<b>1.3.1</b>	54
10.49	<b>1.3.0</b>	54
10.50	<b>1.2.2</b>	54
10.51	<b>1.2.1</b>	54
10.52	<b>1.2.0</b>	55
10.53	<b>1.1.3</b>	55
10.54	<b>1.1.2</b>	55
10.55	<b>1.1.1</b>	55
10.56	<b>1.1.0</b>	55
10.57	<b>1.0.6</b>	56
10.58	<b>1.0.5</b>	56
10.59	<b>1.0.4</b>	56
10.60	<b>1.0.3</b>	56
10.61	<b>1.0.2</b>	56
<b>11</b>	<b>Source code documentation</b>	<b>57</b>
11.1	drf_yasg package	57
	<b>Python Module Index</b>	<b>95</b>
	<b>Index</b>	<b>97</b>



---

## drf-yasg - Yet another Swagger generator

---

Generate **real** Swagger/OpenAPI 2.0 specifications from a Django Rest Framework API.

Compatible with

- **Django Rest Framework:** 3.10, 3.11, 3.12, 3.13, 3.14
- **Django:** 2.2, 3.0, 3.1, 3.2, 4.0, 4.1
- **Python:** 3.6, 3.7, 3.8, 3.9, 3.10, 3.11

Only the latest patch version of each `major.minor` series of Python, Django and Django REST Framework is supported.

**Only the latest version of drf-yasg is supported.** Support of old versions is dropped immediately with the release of a new version. Please do not create issues before upgrading to the latest release available at the time. Regression reports are accepted and will be resolved with a new release as quickly as possible. Removed features will usually go through a deprecation cycle of a few minor releases.

Resources:

- **Source:** <https://github.com/axnsan12/drf-yasg/>
- **Documentation:** <https://drf-yasg.readthedocs.io/>
- **Changelog:** <https://drf-yasg.readthedocs.io/en/stable/changelog.html>
- **Live demo:** <https://drf-yasg-demo.herokuapp.com/>

### 1.1 OpenAPI 3.0 note

If you are looking to add Swagger/OpenAPI support to a new project you might want to take a look at [drf-spectacular](#), which is an actively maintained new library that shares most of the goals of this project, while working with OpenAPI 3.0 schemas.

OpenAPI 3.0 provides a lot more flexibility than 2.0 in the types of API that can be described. `drf-yasg` is unlikely to soon, if ever, get support for OpenAPI 3.0.

## 1.2 Features

- full support for nested Serializers and Schemas
- response schemas and descriptions
- model definitions compatible with codegen tools
- customization hooks at all points in the spec generation process
- JSON and YAML format for spec
- bundles latest version of [swagger-ui](#) and [redoc](#) for viewing the generated documentation
- schema view is cacheable out of the box
- generated Swagger schema can be automatically validated by [swagger-spec-validator](#)
- supports Django REST Framework API versioning with `URLPathVersioning` and `NamespaceVersioning`; other DRF or custom versioning schemes are not currently supported

The screenshot displays the Swagger UI for the `snippets_create` endpoint. The left sidebar shows the navigation menu with 'SNIPPETS' selected. The main area shows the 'REQUEST BODY' and 'RESPONSES' sections.

**REQUEST BODY:**

- `title`: string
- `code`: string **Required**
- `linenos`: boolean
- `language`: string **Required** (Sample help text for language)
- `style`: string (Valid values: "abap", "algot", "algot\_ru", "arduino", "autumn", "berland", "bw", "colorful", "default", "esaca", "friendly", "fruity", "igor", "lowejae", "mami", "monokai", "murphy", "native", "paraiso-dark", "paraiso-light", "pastie", "perldoc", "rainbow\_dash", "rtr", "tango", "tsc", "vim", "vs", "xcode")
- `lines`: Array of Integer
- `example_projects`: Array of Project **Required**

**RESPONSES:**

- 201** (Success):

**RESPONSE SCHEMA:**

- `id`: integer (id serializer help text)
- `owner`: string
- `title`: string

**REQUEST SAMPLES:**

```
{
  "title": "string",
  "code": "string",
  "linenos": true,
  "language": {
    "name": "abap"
  },
  "style": "abap",
  "lines": [
    0
  ],
  "example_projects": [
    {
      "project_name": "string",
      "github_repo": "string"
    }
  ]
}
```

**RESPONSE SAMPLES:**

```
{
  "id": 0,
  "owner": "string",
  "title": "string",
  "code": "string",
  "linenos": true,
  "language": {
    "name": "abap"
  },
  "style": "abap",
  "lines": [
    0
  ],
  "example_projects": [
    {
      "project_name": "string",
      "github_repo": "string"
    }
  ]
}
```

Fig. 1: Fully nested request and response schemas.

## 1.3 Table of contents



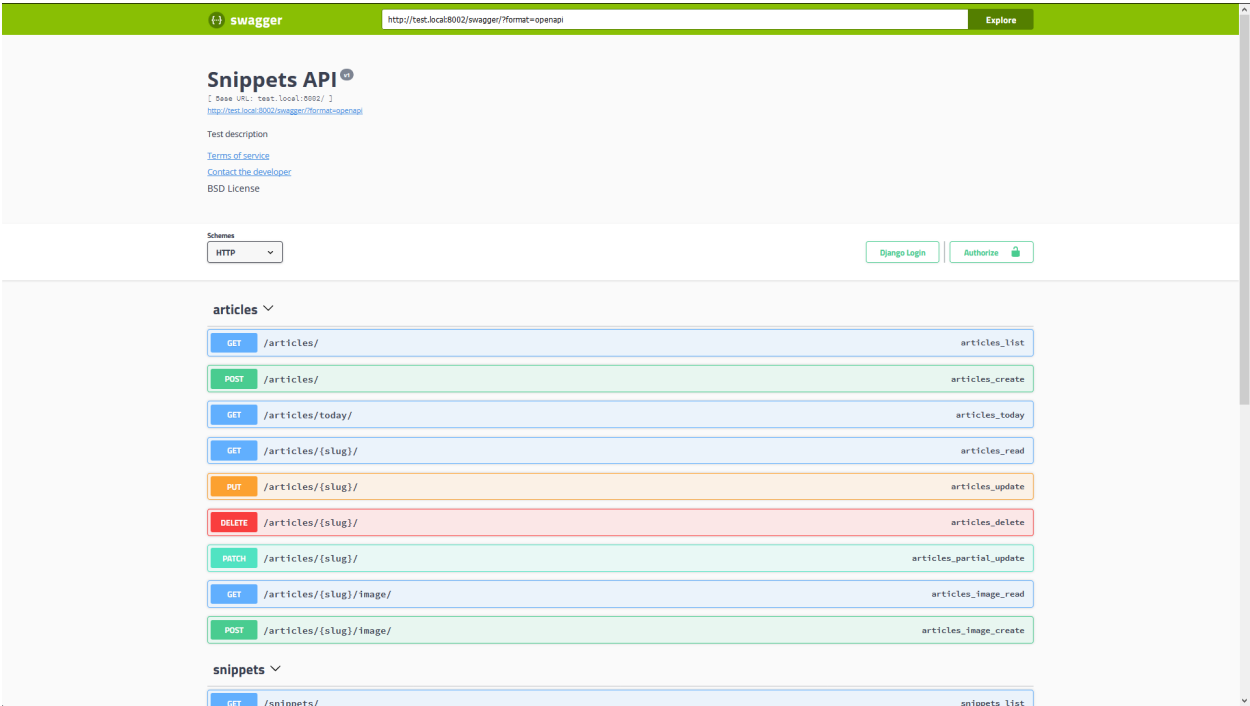


Fig. 2: Choose between redoc and swagger-ui.



Fig. 3: Real Model definitions.

## Contents

- *drf-yasg - Yet another Swagger generator*
  - *OpenAPI 3.0 note*
  - *Features*
  - *Table of contents*
  - *Usage*
    - \* *0. Installation*
    - \* *1. Quickstart*
    - \* *2. Configuration*
      - *a. get\_schema\_view parameters*
      - *b. SchemaView options*
      - *c. SWAGGER\_SETTINGS and REDOC\_SETTINGS*
    - \* *3. Caching*
    - \* *4. Validation*
      - *swagger-ui validation badge*
      - *Using swagger-cli*
      - *Manually on editor.swagger.io*
    - \* *5. Code generation*
    - \* *6. Example project*
  - *Third-party integrations*
    - \* *djangoestframework-camel-case*
    - \* *djangoestframework-recursive*
    - \* *drf-extra-fields*

## 1.4 Usage

### 1.4.1 0. Installation

The preferred installation method is directly from pypi:

```
pip install -U drf-yasg
```

Additionally, if you want to use the built-in validation mechanisms (see [4. Validation](#)), you need to install some extra requirements:

```
pip install -U drf-yasg[validation]
```

## 1.4.2 1. Quickstart

In `settings.py`:

```
INSTALLED_APPS = [
    ...
    'django.contrib.staticfiles', # required for serving swagger ui's css/js files
    'drf_yasg',
    ...
]
```

In `urls.py`:

```
...
from django.urls import re_path
from rest_framework import permissions
from drf_yasg.views import get_schema_view
from drf_yasg import openapi

...

schema_view = get_schema_view(
    openapi.Info(
        title="Snippets API",
        default_version='v1',
        description="Test description",
        terms_of_service="https://www.google.com/policies/terms/",
        contact=openapi.Contact(email="contact@snippets.local"),
        license=openapi.License(name="BSD License"),
    ),
    public=True,
    permission_classes=(permissions.AllowAny,),
)

urlpatterns = [
    path('swagger<format>/', schema_view.without_ui(cache_timeout=0), name='schema-json'),
    path('swagger/', schema_view.with_ui('swagger', cache_timeout=0), name='schema-swagger-ui'),
    path('redoc/', schema_view.with_ui('redoc', cache_timeout=0), name='schema-redoc'),
    ...
]
```

This exposes 4 endpoints:

- A JSON view of your API specification at `/swagger.json`
- A YAML view of your API specification at `/swagger.yaml`
- A swagger-ui view of your API specification at `/swagger/`
- A ReDoc view of your API specification at `/redoc/`

## 1.4.3 2. Configuration

### a. `get_schema_view` parameters

- `info` - Swagger API Info object; if omitted, defaults to `DEFAULT_INFO`

- `url` - API base url; if left blank will be deduced from the location the view is served at
- `patterns` - passed to SchemaGenerator
- `urlconf` - passed to SchemaGenerator
- `public` - if False, includes only endpoints the current user has access to
- `validators` - a list of validator names to apply on the generated schema; only `ssv` is currently supported
- `generator_class` - schema generator class to use; should be a subclass of `OpenAPISchemaGenerator`
- `authentication_classes` - authentication classes for the schema view itself
- `permission_classes` - permission classes for the schema view itself

## b. SchemaView options

- `SchemaView.with_ui(renderer, cache_timeout, cache_kwargs)` - get a view instance using the specified UI renderer; one of `swagger`, `redoc`
- `SchemaView.without_ui(cache_timeout, cache_kwargs)` - get a view instance with no UI renderer; same as `as_cached_view` with no kwargs
- `SchemaView.as_cached_view(cache_timeout, cache_kwargs, **initkwargs)` - same as `as_view`, but with optional caching
- you can, of course, call `as_view` as usual

All of the first 3 methods take two optional arguments, `cache_timeout` and `cache_kwargs`; if present, these are passed on to Django's `cached_page` decorator in order to enable caching on the resulting view. See [3. Caching](#).

## c. SWAGGER\_SETTINGS and REDOC\_SETTINGS

Additionally, you can include some more settings in your `settings.py` file. See <https://drf-yasg.readthedocs.io/en/stable/settings.html> for details.

### 1.4.4 3. Caching

Since the schema does not usually change during the lifetime of the django process, there is out of the box support for caching the schema view in-memory, with some sane defaults:

- caching is enabled by the `cache_page` decorator, using the default Django cache backend, can be changed using the `cache_kwargs` argument
- HTTP caching of the response is blocked to avoid confusing situations caused by being shown stale schemas
- the cached schema varies on the `Cookie` and `Authorization` HTTP headers to enable filtering of visible endpoints according to the authentication credentials of each user; note that this means that every user accessing the schema will have a separate schema cached in memory.

### 1.4.5 4. Validation

Given the numerous methods to manually customize the generated schema, it makes sense to validate the result to ensure it still conforms to OpenAPI 2.0. To this end, validation is provided at the generation point using python swagger libraries, and can be activated by passing `validators=['ssv']` to `get_schema_view`; if the generated schema is not valid, a `SwaggerValidationError` is raised by the handling codec.

**Warning:** This internal validation can slow down your server. Caching can mitigate the speed impact of validation.

The provided validation will catch syntactic errors, but more subtle violations of the spec might slip by them. To ensure compatibility with code generation tools, it is recommended to also employ one or more of the following methods:

### swagger-ui validation badge

#### Online

If your schema is publicly accessible, *swagger-ui* will automatically validate it against the official swagger online validator and display the result in the bottom-right validation badge.

#### Offline

If your schema is not accessible from the internet, you can run a local copy of *swagger-validator* and set the `VALIDATOR_URL` accordingly:

```
SWAGGER_SETTINGS = {
    ...
    'VALIDATOR_URL': 'http://localhost:8189',
    ...
}
```

```
$ docker run --name swagger-validator -d -p 8189:8080 --add-host test.local:10.0.75.1
↪swaggerapi/swagger-validator
84dabd52ba967c32ae6b660934fa6a429ca6bc9e594d56e822a858b57039c8a2
$ curl http://localhost:8189/debug?url=http://test.local:8002/swagger/?format=openapi
{}
```

### Using swagger-cli

<https://www.npmjs.com/package/swagger-cli>

```
$ npm install -g swagger-cli
[...]
$ swagger-cli validate http://test.local:8002/swagger.yaml
http://test.local:8002/swagger.yaml is valid
```

### Manually on editor.swagger.io

Importing the generated spec into <https://editor.swagger.io/> will automatically trigger validation on it. This method is currently the only way to get both syntactic and semantic validation on your specification. The other validators only provide JSON schema-level validation, but miss things like duplicate operation names, improper content types, etc

## 1.4.6 5. Code generation

You can use the specification outputted by this library together with *swagger-codegen* to generate client code in your language of choice:

```
$ docker run --rm -v ${PWD}:/local swaggerapi/swagger-codegen-cli generate -i /local/
↪tests/reference.yaml -l javascript -o /local/.codegen/js
```

See the github page linked above for more details.

## 1.4.7 6. Example project

For additional usage examples, you can take a look at the test project in the `testproj` directory:

```
$ git clone https://github.com/axnsan12/drf-yasg.git
$ cd drf-yasg
$ virtualenv venv
$ source venv/bin/activate
(venv) $ cd testproj
(venv) $ python -m pip install -U pip setuptools
(venv) $ pip install -U -r requirements.txt
(venv) $ python manage.py migrate
(venv) $ python manage.py runserver
(venv) $ firefox localhost:8000/swagger/
```

## 1.5 Third-party integrations

### 1.5.1 djangoestframework-camel-case

Integration with `djangoestframework-camel-case` is provided out of the box - if you have `djangoestframework-camel-case` installed and your `APIView` uses `CamelCaseJSONParser` or `CamelCaseJSONRenderer`, all property names will be converted to *camelCase* by default.

### 1.5.2 djangoestframework-recursive

Integration with `djangoestframework-recursive` is provided out of the box - if you have `djangoestframework-recursive` installed.

### 1.5.3 drf-extra-fields

Integration with `drf-extra-fields` has a problem with Base64 fields. The drf-yasg will generate Base64 file or image fields as Readonly and not required. Here is a workaround code for display the Base64 fields correctly.

```
class PDFBase64FileField(Base64FileField):
    ALLOWED_TYPES = ['pdf']

    class Meta:
        swagger_schema_fields = {
            'type': 'string',
            'title': 'File Content',
            'description': 'Content of the file base64 encoded',
            'read_only': False # <-- FIX
        }

    def get_file_extension(self, filename, decoded_file):
        try:
            PyPDF2.PdfFileReader(io.BytesIO(decoded_file))
        except PyPDF2.utils.PdfReadError as e:
            logger.warning(e)
```

(continues on next page)

(continued from previous page)

```
else:  
    return 'pdf'
```





---

## Serving the schema

---

### 2.1 `get_schema_view` and the `SchemaView` class

The `get_schema_view()` function and the `SchemaView` class it returns (click links for documentation) are intended to cover the majority of use cases one might want to configure. The class returned by `get_schema_view()` can be used to obtain view instances via `SchemaView.with_ui()`, `SchemaView.without_ui()` and `SchemaView.as_cached_view()` - see *1. Quickstart* in the README for a usage example.

You can also subclass `SchemaView` by extending the return value of `get_schema_view()`, e.g.:

```
SchemaView = get_schema_view(info, ...)

class CustomSchemaView(SchemaView):
    generator_class = CustomSchemaGenerator
    renderer_classes = (CustomRenderer1, CustomRenderer2,)
```

### 2.2 Renderers and codecs

If you need to modify how your Swagger spec is presented in views, you might want to override one of the renderers in `renderers` or one of the codecs in `codecs`. The codec is the last stage where the Swagger object arrives before being transformed into bytes, while the renderer is the stage responsible for tying together the codec and the view.

You can use your custom renderer classes as kwargs to `SchemaView.as_cached_view()` or by subclassing `SchemaView`.

### 2.3 Management command

If you only need a swagger spec file in YAML or JSON format, you can use the `generate_swagger` management command to get it without having to start the web server:

```
$ python manage.py generate_swagger swagger.json
```

See the command help for more advanced options:

```
$ python manage.py generate_swagger --help
usage: manage.py generate_swagger [-h] [--version] [-v {0,1,2,3}]
    ... more options ...
```

---

**Note:** The *DEFAULT\_INFO* setting must be defined when using the `generate_swagger` command. For example, the *README quickstart* code could be modified as such:

In `settings.py`:

```
SWAGGER_SETTINGS = {
    'DEFAULT_INFO': 'import.path.to.urls.api_info',
}
```

In `urls.py`:

```
api_info = openapi.Info(
    title="Snippets API",
    ... other arguments ...
)

schema_view = get_schema_view(
    # the info argument is no longer needed here as it will be picked up from DEFAULT_
    ↪ INFO
    ... other arguments ...
)
```

### 3.1 OpenAPI specification overview

This library generates OpenAPI 2.0 documents. The authoritative specification for this document's structure will always be the official documentation over at [swagger.io](https://swagger.io) and the [OpenAPI 2.0 specification page](#).

Because the above specifications are a bit heavy and convoluted, here is a general overview of how the specification is structured, starting from the root `Swagger` object.

- **Swagger** object
  - `info`, `schemes`, `securityDefinitions` and other informative attributes
  - **paths**: **Paths** object A list of all the paths in the API in the form of a mapping
    - \* `{path}`: **PathItem** - each **PathItem** has multiple operations keyed by method
      - `{http_method}`: **Operation** Each operation is thus uniquely identified by its (path, http\_method) combination, e.g. GET /articles/, POST /articles/, etc.
      - `parameters`: [**Parameter**] - and a list of path parameters
  - **definitions**: **named Models** A list of all the named models in the API in the form of a mapping
    - \* `{modelName}`: **Schema**
- **Operation** contains the following information about each operation:
  - **parameters**: [**Parameter**] A list of all the *query*, *header* and *form* parameters accepted by the operation.
    - \* there can also be **at most one** body parameter whose structure is represented by a **Schema** or a reference to one (**SchemaRef**)
  - **responses**: **Responses** A list of all the possible responses the operation is expected to return. Each response can optionally have a **Schema** which describes the structure of its body.
    - \* `{status_code}`: **Response** - mapping of status code to response definition

- `operationId` - should be unique across all operations
- `tags` - used to group operations in the listing

It is interesting to note the main differences between *Parameter* and *Schema* objects:

<i>Schema</i>	<i>Parameter</i>
Can nest other Schemas	Cannot nest other Parameters Can only nest a Schema if the parameter is in: <code>body</code>
Cannot describe file uploads - <code>file</code> is not permitted as a value for <code>type</code>	Can describe file uploads via <code>type = file</code> , but only as part of a form <i>Operation</i> <sup>1</sup>
Can be used in <i>Responses</i>	Cannot be used in <i>Responses</i>
Cannot be used in form <i>Operations</i> <sup>1</sup>	Can be used in form <i>Operations</i> <sup>1</sup>
Can only describe request or response bodies	Can describe query, form, header or path parameters

## 3.2 Default behavior

This section describes where information is sourced from when using the default generation process.

- *Paths* are generated by exploring the patterns registered in your default `urlconf`, or the patterns and `urlconf` you specified when constructing *OpenAPISchemaGenerator*; only views inheriting from Django Rest Framework's `APIView` are looked at, all other views are ignored
- path *Parameters* are generated by looking in the URL pattern for any template parameters; attempts are made to guess their type from the views `queryset` and `lookup_field`, if applicable. You can override path parameters via `manual_parameters` in *@swagger\_auto\_schema*.
- query *Parameters* - i.e. parameters specified in the URL as `/path/?query1=value&query2=value` - are generated from your view's `filter_backends` and `paginator`, if any are declared. Additional parameters can be specified via the `query_serializer` and `manual_parameters` arguments of *@swagger\_auto\_schema*
- The request body is only generated for the HTTP POST, PUT and PATCH methods, and is sourced from the view's `serializer_class`. You can also override the request body using the `request_body` argument of *@swagger\_auto\_schema*.
  - if the view represents a form request (that is, all its parsers are of the `multipart/form-data` or `application/x-www-form-urlencoded` media types), the request body will be output as form *Parameters*
  - if it is not a form request, the request body will be output as a single *body Parameter* wrapped around a *Schema*
- header *Parameters* are supported by the OpenAPI specification but are never generated by this library; you can still add them using `manual_parameters`.
- *Responses* are generated as follows:
  - if `responses` is provided to *@swagger\_auto\_schema* and contains at least one success status code (i.e. any 2xx status code), no automatic response is generated and the given response is used as described in the *@swagger\_auto\_schema documentation*

---

<sup>1</sup> a form Operation is an *Operation* that consumes `multipart/form-data` or `application/x-www-form-urlencoded` content

- a form Operation cannot have *body* parameters
- a non-form operation cannot have *form* parameters

- otherwise, an attempt is made to generate a default response:
  - \* the success status code is assumed to be 204 for DELETE requests, 201 for POST requests, and 200 for all other request methods
  - \* if the view has a request body, the same `Serializer` or *Schema* as in the request body is used in generating the *Response* schema; this is inline with the default `GenericAPIView` and `GenericViewSet` behavior
  - \* if the view has no request body, its `serializer_class` is used to generate the *Response* schema
  - \* if the view is a list view (as defined by `is_list_view()`), the response schema is wrapped in an array
  - \* if the view is also paginated, the response schema is then wrapped in the appropriate paging response structure
  - \* the description of the response is left blank
- *Response* headers are supported by the OpenAPI specification but not currently supported by this library; you can still add them manually by providing an *appropriately structured dictionary* to the `headers` property of a *Response* object
- *descriptions* for *Operations*, *Parameters* and *Schemas* are picked up from docstrings and `help_text` attributes in the same manner as the *default DRF SchemaGenerator*
- The base URL for the API consists of three values - the `host`, `schemes` and `basePath` attributes
- The host name and scheme are determined, in descending order of priority:
  - from the `url` argument passed to `get_schema_view()` (more specifically, to the underlying *OpenAPISchemaGenerator*)
  - from the *DEFAULT\_API\_URL setting*
  - inferred from the request made to the schema endpoint

For example, an url of `https://www.example.com:8080/some/path` will populate the `host` and `schemes` attributes with `www.example.com:8080` and `['https']`, respectively. The path component will be ignored.

- The base path is determined as the concatenation of two variables:
  1. the *SCRIPT\_NAME* wsgi environment variable; this is set, for example, when serving the site from a sub-path using web server url rewriting

---

**Tip:** The Django *FORCE\_SCRIPT\_NAME* setting can be used to override the *SCRIPT\_NAME* or set it when it's missing from the environment.

---

2. the longest common path prefix of all the urls in your API - see `determine_path_prefix()`
- When using API versioning with `NamespaceVersioning` or `URLPathVersioning`, versioned endpoints that do not match the version used to access the `SchemaView` will be excluded from the endpoint list - for example, `/api/v1.0/endpoint` will be shown when viewing `/api/v1.0/swagger/`, while `/api/v2.0/endpoint` will not

Other versioning schemes are not presently supported.

### 3.3 A note on limitations

When schema generation is requested, available endpoints are inspected by enumeration all the routes registered in Django's `urlconf`. Each registered view is then artificially instantiated for introspection, and it is this step that brings some limitations to what can be done:

- the request the view sees will always be the request made against the schema view endpoint - e.g. `GET /swagger.yaml`
- path parameters will not be filled

This means that you could get surprising results if your `get_serializer` or `get_serializer_class` methods depend on the incoming request, call `get_object` or in general depend on any stateful logic. You can prevent this in a few ways:

- provide a fixed serializer for request and response body introspection using `@swagger_auto_schema`, to prevent `get_serializer` from being called on the view
- *exclude your endpoint from introspection*
- use the `swagger_fake_view` marker to detect requests generated by drf-yasg:

```
def get_serializer_class(self):
    if getattr(self, 'swagger_fake_view', False):
        return TodoTreeSerializer

    raise NotImplementedError("must not call this")
```

---

## Describing authentication schemes

---

When using the *swagger-ui* frontend, it is possible to interact with the API described by your Swagger document. This interaction might require authentication, which you will have to describe in order to make *swagger-ui* work with it.

### 4.1 Security definitions

The first step that you have to do is add a *SECURITY\_DEFINITIONS* setting to declare all authentication schemes supported by your API.

For example, the definition for a simple API accepting HTTP basic auth and *Authorization* header API tokens would be:

```
SWAGGER_SETTINGS = {
  'SECURITY_DEFINITIONS': {
    'Basic': {
      'type': 'basic'
    },
    'Bearer': {
      'type': 'apiKey',
      'name': 'Authorization',
      'in': 'header'
    }
  }
}
```

### 4.2 Security requirements

The second step is specifying, for each endpoint, which authentication mechanism can be used for interacting with it. See <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/2.0.md#security-requirement-object> for details.

By default, a top-level *security* that accepts any one of the declared security definitions is generated. For the example above, that would be `[{'Basic': []}, {'Bearer': []}]`. This can be overridden using the *SECURITY\_REQUIREMENTS* setting.

Operation-level overrides can be added using the *security* parameter of *@swagger\_auto\_schema*.

## 4.3 swagger-ui as OAuth2 client

It is possible to configure *swagger-ui* to authenticate against your (or a third party) OAuth2 service when sending “Try it out” requests. This client-side configuration does not remove the requirement of a spec-side *security definition*, but merely allows you to test OAuth2 APIs using *swagger-ui* as a client.

**DISCLAIMER:** this setup is very poorly tested as I do not currently implement OAuth in any of my projects. All contributions relating to documentation, bugs, mistakes or anything else are welcome as an issue or pull request. The settings described below were added as a result of discussion in issue #53.

The settings of interest can be found on the *settings page*. Configuration options are similar to most OAuth client setups like web or mobile applications. Reading the relevant *swagger-ui* documentation linked will also probably help.

### 4.3.1 Example

A very simple working configuration was provided by @Vigron, originally at [https://github.com/Vigron/django\\_oauth2\\_example](https://github.com/Vigron/django_oauth2_example).

```
SWAGGER_SETTINGS = {
    'USE_SESSION_AUTH': False,
    'SECURITY_DEFINITIONS': {
        'Your App API - Swagger': {
            'type': 'oauth2',
            'authorizationUrl': '/yourapp/o/authorize',
            'tokenUrl': '/yourapp/o/token/',
            'flow': 'accessCode',
            'scopes': {
                'read:groups': 'read groups',
            }
        }
    },
    'OAUTH2_CONFIG': {
        'clientId': 'yourAppClientId',
        'clientSecret': 'yourAppClientSecret',
        'appName': 'your application name'
    },
}
```

If the OAuth2 provider requires you to provide the full absolute redirect URL, the default value for most staticfiles configurations will be `<origin>/static/drf-yasg/swagger-ui-dist/oauth2-redirect.html`. If this is not suitable for some reason, you can override the *OAUTH2\_REDIRECT\_URL* setting as appropriate.



---

## Custom schema generation

---

If the default spec generation does not quite match what you were hoping to achieve, `drf-yasg` provides some custom behavior hooks by default.

### 5.1 Excluding endpoints

You can prevent a view from being included in the Swagger view by setting its class-level `swagger_schema` attribute to `None`, or you can prevent an operation from being included by setting its `auto_schema` override to `none` in `@swagger_auto_schema`:

```
class UserList(APIView):
    swagger_schema = None

    # all methods of the UserList class will be excluded
    ...

# only the GET method will be shown in Swagger
@swagger_auto_schema(method='put', auto_schema=None)
@swagger_auto_schema(methods=['get'], ...)
@api_view(['GET', 'PUT'])
def user_detail(request, pk):
    pass
```

### 5.2 The `@swagger_auto_schema` decorator

You can use the `@swagger_auto_schema` decorator on view functions to override some properties of the generated *Operation*. For example, in a `ViewSet`,

```
from drf_yasg.utils import swagger_auto_schema
```

(continues on next page)

(continued from previous page)

```
@swagger_auto_schema(operation_description="partial_update description override",
↳ responses={404: 'slug not found'})
def partial_update(self, request, *args, **kwargs):
    """partial_update method docstring"""
    ...
```

will override the description of the PATCH /article/{id}/ operation, and document a 404 response with no body and the given description.

Where you can use the `@swagger_auto_schema` decorator depends on the type of your view:

- for function based `@api_views`, because the same view can handle multiple methods, and thus represent multiple operations, you have to add the decorator multiple times if you want to override different operations:

```
from drf_yasg import openapi
from drf_yasg.utils import swagger_auto_schema
from rest_framework.decorators import api_view

from drf_yasg import openapi

test_param = openapi.Parameter('test', openapi.IN_QUERY, description=
↳ "test manual param", type=openapi.TYPE_BOOLEAN)
user_response = openapi.Response('response description', UserSerializer)

# 'method' can be used to customize a single HTTP method of a view
@swagger_auto_schema(method='get', manual_parameters=[test_param],
↳ responses={200: user_response})
# 'methods' can be used to apply the same modification to multiple
↳ methods
@swagger_auto_schema(methods=['put', 'post'], request_
↳ body=UserSerializer)
@api_view(['GET', 'PUT', 'POST'])
def user_detail(request, pk):
    ...
```

- for class based `APIView`, `GenericAPIView` and non-`ViewSet` derivatives, you have to decorate the respective method of each operation:

```
class UserList(APIView):
    @swagger_auto_schema(responses={200: UserSerializer(many=True)})
    def get(self, request):
        ...

    @swagger_auto_schema(operation_description="description")
    def post(self, request):
        ...
```

- for `ViewSet`, `GenericViewSet`, `ModelViewSet`, because each viewset corresponds to multiple **paths**, you have to decorate the *action methods*, i.e. `list`, `create`, `retrieve`, etc. Additionally, `@actions` defined on the viewset, like function based api views, can respond to multiple HTTP methods and thus have multiple operations that must be decorated separately:

```
class ArticleViewSet(viewsets.ModelViewSet):
    # method or 'methods' can be skipped because the action only handles
↳ a single method (GET)
    @swagger_auto_schema(operation_description='GET /articles/today/')
    @action(detail=False, methods=['get'])
```

(continues on next page)

(continued from previous page)

```

def today(self, request):
    ...

    @swagger_auto_schema(method='get', operation_description="GET /
→articles/{id}/image/")
    @swagger_auto_schema(method='post', operation_description="POST /
→articles/{id}/image/")
    @action(detail=True, methods=['get', 'post'], parser_
→classes=(MultiPartParser,))
    def image(self, request, id=None):
        ...

    @swagger_auto_schema(operation_description="PUT /articles/{id}/")
    def update(self, request, *args, **kwargs):
        ...

    @swagger_auto_schema(operation_description="PATCH /articles/{id}/")
    def partial_update(self, request, *args, **kwargs):
        ...

```

**Tip:** If you want to customize the generation of a method you are not implementing yourself, you can use `swagger_auto_schema` in combination with Django's `method_decorator`:

```

@method_decorator(name='list', decorator=swagger_auto_schema(
    operation_description="description from swagger_auto_schema via method_decorator"
))
class ArticleViewSet(viewsets.ModelViewSet):
    ...

```

This allows you to avoid unnecessarily overriding the method.

**Tip:** You can go even further and directly decorate the result of `as_view`, in the same manner you would override an `@api_view` as described above:

```

decorated_login_view = \
    swagger_auto_schema(
        method='post',
        responses={status.HTTP_200_OK: LoginResponseSerializer}
    )(LoginView.as_view())

urlpatterns = [
    ...
    url(r'^login/$', decorated_login_view, name='login')
]

```

This can allow you to avoid skipping an unnecessary *subclass* altogether.

**Warning:** However, do note that both of the methods above can lead to unexpected (and maybe surprising) results by replacing/decorating methods on the base class itself.

## 5.3 Support for SerializerMethodField

Schema generation of `serializers.SerializerMethodField` is supported in two ways:

- 1) The `swagger_serializer_method` decorator for the use case where the serializer method is using a serializer. e.g.:

```
from drf_yasg.utils import swagger_serializer_method

class OtherStuffSerializer(serializers.Serializer):
    foo = serializers.CharField()

class ParentSerializer(serializers.Serializer):
    other_stuff = serializers.SerializerMethodField()
    many_other_stuff = serializers.SerializerMethodField()

    @swagger_serializer_method(serializer_or_field=OtherStuffSerializer)
    def get_other_stuff(self, obj):
        return OtherStuffSerializer().data

    @swagger_serializer_method(serializer_or_
    ↪field=OtherStuffSerializer(many=True))
    def get_many_other_stuff(self, obj):
        return OtherStuffSerializer().data
```

Note that the `serializer_or_field` parameter can accept either a subclass or an instance of `serializers.Field`.

- 2) For simple cases where the method is returning one of the supported types, [Python 3 type hinting](#) of the serializer method return value can be used. e.g.:

```
class SomeSerializer(serializers.Serializer):
    some_number = serializers.SerializerMethodField()

    def get_some_number(self, obj) -> float:
        return 1.0
```

When return type hinting is not supported, the equivalent `serializers.Field` subclass can be used with `swagger_serializer_method`:

```
class SomeSerializer(serializers.Serializer):
    some_number = serializers.SerializerMethodField()

    @swagger_serializer_method(serializer_or_field=serializers.FloatField)
    def get_some_number(self, obj):
        return 1.0
```

## 5.4 Serializer Meta nested class

You can define some per-serializer or per-field options by adding a Meta class to your `Serializer` or `serializer Field`, e.g.:

```
class WhateverSerializer(Serializer):
    ...
```

(continues on next page)

(continued from previous page)

```
class Meta:
    ... options here ...
```

The available options are:

- `ref_name` - a string which will be used as the model definition name for this serializer class; setting it to `None` will force the serializer to be generated as an inline model everywhere it is used. If two serializers have the same `ref_name`, both their usages will be replaced with a reference to the same definition. If this option is not specified, all serializers have an implicit name derived from their class name, minus any `Serializer` suffix (e.g. `UserSerializer` -> `User`, `SerializerWithSuffix` -> `SerializerWithSuffix`)
- `swagger_schema_fields` - a dictionary mapping *Schema* field names to values. These attributes will be set on the *Schema* object generated from the *Serializer*. Field names must be python values, which are converted to Swagger Schema attribute names according to `make_swagger_name()`. Attribute names and values must conform to the *OpenAPI 2.0* specification.

Suppose you wanted to model an email using a *JSONField* to store the subject and body for performance reasons:

```
from django.contrib.postgres.fields import JSONField

class Email(models.Model):
    # Store data as JSON, but the data should be made up of
    # an object that has two properties, "subject" and "body"
    # Example:
    # {
    #     "subject": "My Title",
    #     "body": "The body of the message.",
    # }
    message = JSONField()
```

To instruct drf-yasg to output an OpenAPI schema that matches this, create a custom *JSONField*:

```
class EmailMessageField(serializers.JSONField):
    class Meta:
        swagger_schema_fields = {
            "type": openapi.TYPE_OBJECT,
            "title": "Email",
            "properties": {
                "subject": openapi.Schema(
                    title="Email subject",
                    type=openapi.TYPE_STRING,
                ),
                "body": openapi.Schema(
                    title="Email body",
                    type=openapi.TYPE_STRING,
                ),
            },
            "required": ["subject", "body"],
        }

class EmailSerializer(ModelSerializer):
    class Meta:
        model = Email
        fields = "__all__"

    message = EmailMessageField()
```

**Warning:** Overriding a default Field generated by a ModelSerializer will also override automatically generated validators for that Field. To add Serializer validation back in manually, see the relevant [DRF Validators](#) and [DRF Fields](#) documentation.

One example way to do this is to set the `default_validators` attribute on a field.

```
class EmailMessageField(serializers.JSONField):
    default_validators = [my_custom_email_validator]
    ...
```

## 5.5 Subclassing and extending

### 5.5.1 SwaggerAutoSchema

For more advanced control you can subclass `SwaggerAutoSchema` - see the documentation page for a list of methods you can override.

You can put your custom subclass to use by setting it on a view method using the `@swagger_auto_schema` decorator described above, by setting it as a class-level attribute named `swagger_schema` on the view class, or *globally via settings*.

For example, to generate all operation IDs as camel case, you could do:

```
from inflection import camelize

class CamelCaseOperationIDAutoSchema(SwaggerAutoSchema):
    def get_operation_id(self, operation_keys):
        operation_id = super(CamelCaseOperationIDAutoSchema, self).get_operation_
        ↪id(operation_keys)
        return camelize(operation_id, uppercase_first_letter=False)

SWAGGER_SETTINGS = {
    'DEFAULT_AUTO_SCHEMA_CLASS': 'path.to.CamelCaseOperationIDAutoSchema',
    ...
}
```

### 5.5.2 OpenAPISchemaGenerator

If you need to control things at a higher level than `Operation` objects (e.g. overall document structure, vendor extensions in metadata) you can also subclass `OpenAPISchemaGenerator` - again, see the documentation page for a list of its methods.

This custom generator can be put to use by setting it as the `generator_class` of a `SchemaView` using `get_schema_view()`.

### 5.5.3 Inspector classes

For customizing behavior related to specific field, serializer, filter or paginator classes you can implement the `FieldInspector`, `SerializerInspector`, `FilterInspector`, `PaginatorInspector` classes and use them with `@swagger_auto_schema` or one of the *related settings*.

A *FilterInspector* that adds a description to all DjangoFilterBackend parameters could be implemented like so:

```
class DjangoFilterDescriptionInspector(CoreAPICompatInspector):
    def get_filter_parameters(self, filter_backend):
        if isinstance(filter_backend, DjangoFilterBackend):
            result = super(DjangoFilterDescriptionInspector, self).get_filter_
↳parameters(filter_backend)
            for param in result:
                if not param.get('description', ''):
                    param.description = "Filter the returned list by {field_name}".
↳format(field_name=param.name)

            return result

        return NotHandled

@method_decorator(name='list', decorator=swagger_auto_schema(
    filter_inspectors=[DjangoFilterDescriptionInspector]
))
class ArticleViewSet(viewsets.ModelViewSet):
    filter_backends = (DjangoFilterBackend,)
    filterset_fields = ('title',)
    ...
```

A second example, of a *FieldInspector* that removes the title attribute from all generated *Schema* objects:

```
from drf_yasg.inspectors import FieldInspector

class NoSchemaTitleInspector(FieldInspector):
    def process_result(self, result, method_name, obj, **kwargs):
        # remove the `title` attribute of all Schema objects
        if isinstance(result, openapi.Schema.OR_REF):
            # traverse any references and alter the Schema object in place
            schema = openapi.resolve_ref(result, self.components)
            schema.pop('title', None)

            # no ``return schema`` here, because it would mean we always generate
            # an inline `object` instead of a definition reference

            # return back the same object that we got - i.e. a reference if we got a
↳reference
            return result

class NoTitleAutoSchema(SwaggerAutoSchema):
    field_inspectors = [NoSchemaTitleInspector] + swagger_settings.DEFAULT_FIELD_
↳INSPECTORS

class ArticleViewSet(viewsets.ModelViewSet):
    swagger_schema = NoTitleAutoSchema
    ...
```

**Note:** A note on references - *Schema* objects are sometimes output by reference (*SchemaRef*); in fact, that is how named models are implemented in OpenAPI:

- in the output swagger document there is a definitions section containing *Schema* objects for all models

- every usage of a model refers to that single *Schema* object - for example, in the `ArticleViewSet` above, all requests and responses containing an `Article` model would refer to the same schema definition by a `'$ref': '#/definitions/Article'`

This is implemented by only generating **one** *Schema* object for every serializer **class** encountered.

This means that you should generally avoid view or method-specific `FieldInspectors` if you are dealing with references (a.k.a named models), because you can never know which view will be the first to generate the schema for a given serializer.

**IMPORTANT:** nested fields on `ModelSerializers` that are generated from model `ForeignKeys` will always be output by value. If you want the by-reference behavior you have to explicitly set the serializer class of nested fields instead of letting `ModelSerializer` generate one automatically; for example:

```
class OneSerializer(serializers.ModelSerializer):
    class Meta:
        model = SomeModel
        fields = ('id',)

class AnotherSerializer(serializers.ModelSerializer):
    child = OneSerializer()

    class Meta:
        model = SomeParentModel
        fields = ('id', 'child')
```

Another caveat that stems from this is that any serializer named “`NestedSerializer`” will be forced inline unless it has a `ref_name` set explicitly.

---



---

### Customizing the web UI

---

The web UI can be customized using the settings available in *Swagger UI settings* and *ReDoc UI settings*.

You can also extend one of the `drf-yasg/swagger-ui.html` or `drf-yasg/redoc.html` templates that are used for rendering. See the template source code (linked above) for a complete list of customizable blocks.

The `swagger-ui` view has some quite involved JavaScript hooks used for some functionality, which you might also want to review at `drf-yasg/swagger-ui-init.js`.



Settings are configurable in `settings.py` by defining `SWAGGER_SETTINGS` or `REDOC_SETTINGS`.

Example:

**settings.py**

```
SWAGGER_SETTINGS = {
    'SECURITY_DEFINITIONS': {
        'basic': {
            'type': 'basic'
        }
    },
    ...
}

REDOC_SETTINGS = {
    'LAZY_RENDERING': False,
    ...
}
```

All settings which configure URLs (`LOGIN_URL`, `SPEC_URL`, `VALIDATOR_URL`, etc.) can accept several forms of input:

- A view name: `urls.reverse()` will be used to reverse-resolve the name
- A 2-tuple of `(view_name, kwargs)`: `urls.reverse()` will be used to reverse-resolve the name using the given `kwargs`; `kwargs` must be a dict
- A 3-tuple of `(view_name, args, kwargs)`: `urls.reverse()` will be used to reverse-resolve the name using the given `args` and `kwargs`; `args`, `kwargs` must be a tuple/list and a dict respectively
- A URL, which will be used as-is

The possible settings and their default values are as follows:

## 7.1 SWAGGER\_SETTINGS

### 7.1.1 Default classes

#### DEFAULT\_GENERATOR\_CLASS

*OpenAPISchemaGenerator* subclass that will be used by default for generating the final *Schema* object. Can be overridden by the `generator_class` argument to `get_schema_view()`.

**Default:** `drf_yasg.generators.OpenAPISchemaGenerator`

#### DEFAULT\_AUTO\_SCHEMA\_CLASS

*ViewInspector* subclass that will be used by default for generating *Operation* objects when iterating over endpoints. Can be overridden by using the `auto_schema` argument of `@swagger_auto_schema` or by a `swagger_schema` attribute on the view class.

**Default:** `drf_yasg.inspectors.SwaggerAutoSchema`

#### DEFAULT\_FIELD\_INSPECTORS

List of *FieldInspector* subclasses that will be used by default for inspecting serializers and serializer fields. Field inspectors given to `@swagger_auto_schema` will be prepended to this list.

**Default:** `[ 'drf_yasg.inspectors.CamelCaseJSONFilter', 'drf_yasg.inspectors.ReferencingSerializerInspector', 'drf_yasg.inspectors.RelatedFieldInspector', 'drf_yasg.inspectors.ChoiceFieldInspector', 'drf_yasg.inspectors.FileFieldInspector', 'drf_yasg.inspectors.DictFieldInspector', 'drf_yasg.inspectors.JSONFieldInspector', 'drf_yasg.inspectors.HiddenFieldInspector', 'drf_yasg.inspectors.RecursiveFieldInspector', 'drf_yasg.inspectors.SerializerMethodFieldInspector', 'drf_yasg.inspectors.SimpleFieldInspector', 'drf_yasg.inspectors.StringDefaultFieldInspector', ]`

#### DEFAULT\_FILTER\_INSPECTORS

List of *FilterInspector* subclasses that will be used by default for inspecting filter backends. Filter inspectors given to `@swagger_auto_schema` will be prepended to this list.

**Default:** `[ 'drf_yasg.inspectors.CoreAPICompatInspector', ]`

#### DEFAULT\_PAGINATOR\_INSPECTORS

List of *PaginatorInspector* subclasses that will be used by default for inspecting paginators. Paginator inspectors given to `@swagger_auto_schema` will be prepended to this list.

**Default:** `[ 'drf_yasg.inspectors.DjangoRestResponsePagination', 'drf_yasg.inspectors.CoreAPICompatInspector', ]`

## DEFAULT\_SPEC\_RENDERERS

List of spec renderers classes which used for plain schema rendering.

**Default:** `[ 'drf_yasg.renderers.SwaggerYAMLRenderer', 'drf_yasg.renderers.SwaggerJSONRenderer', 'drf_yasg.renderers.OpenAPIRenderer', ]`

## 7.1.2 Swagger document attributes

### EXCLUDED\_MEDIA\_TYPES

A list of keywords for excluding MIME types from `Operation.produces`. Any MIME type string which includes one of the substrings in this list will be prevented from appearing in a `produces` array in the Swagger document.

**Default:** `[ 'html' ]`

### DEFAULT\_INFO

An import string to an `openapi.Info` object. This will be used when running the `generate_swagger` management command, or if no `info` argument is passed to `get_schema_view()`.

**Default:** `None`

### DEFAULT\_API\_URL

A string representing the default API URL. This will be used to populate the `host` and `schemes` attributes of the Swagger document if no API URL is otherwise provided. The Django `FORCE_SCRIPT_NAME` setting can be used for providing an API mount point prefix.

See also: [documentation on base URL construction](#)

**Default:** `None`

## 7.1.3 Authorization

### USE\_SESSION\_AUTH

Enable/disable Django login as an authentication/authorization mechanism. If `True`, a login/logout button will be displayed in Swagger UI.

**Default:** `True`

### LOGIN\_URL

URL for the Django Login action when using `USE_SESSION_AUTH`.

**Default:** `django.conf.settings.LOGIN_URL`

### LOGOUT\_URL

URL for the Django Logout action when using `USE_SESSION_AUTH`.

**Default:**  `'/accounts/logout/'`

## SECURITY\_DEFINITIONS

Swagger security definitions to be included in the specification. See <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/2.0.md#security-definitions-object>.

**Default:**

```
'basic': {  
    'type': 'basic'  
}
```

## SECURITY\_REQUIREMENTS

Global security requirements. If `None`, all schemes in `SECURITY_DEFINITIONS` are accepted. See <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/2.0.md#securityRequirementObject>.

**Default:** `None`

### 7.1.4 Swagger UI settings

Swagger UI configuration settings. See <https://github.com/swagger-api/swagger-ui/blob/112bca906553a937ac67adc2e500bdeed96d067b/docs/usage/configuration.md#parameters>.

## SPEC\_URL

URL pointing to a swagger document for use by swagger-ui. The default behavior is to append `?format=openapi` to the URL which serves the UI; see *note on URL settings* above.

**Default:** `None` *Maps to parameter:* `url`

## VALIDATOR\_URL

URL pointing to a swagger-validator instance; used for the validation badge shown in swagger-ui. Can be modified to point to a local install of [swagger-validator](#) or set to `None` to remove the badge.

**Default:** `'http://online.swagger.io/validator/'` *Maps to parameter:* `validatorUrl`

## PERSIST\_AUTH

Persist swagger-ui authorization data to local storage. **WARNING:** This may be a security risk as the credentials are stored unencrypted and can be accessed by all javascript code running on the same domain.

**Default:** `False` *Maps to parameter:* `-`

## REFETCH\_SCHEMA\_WITH\_AUTH

Re-fetch the OpenAPI document with the new credentials after authorization is performed through swagger-ui.

**Default:** `False` *Maps to parameter:* `-`

## REFETCH\_SCHEMA\_ON\_LOGOUT

Re-fetch the OpenAPI document without credentials after authorization is removed through swagger-ui.

**Default:** `False` *Maps to parameter:* -

## FETCH\_SCHEMA\_WITH\_QUERY

Fetch the OpenAPI document using the query parameters passed to the swagger-ui page request.

**Default:** `True` *Maps to parameter:* -

## OPERATIONS\_SORTER

Sorting order for the operation list of each tag.

- `None`: show in the order returned by the server
- `'alpha'`: sort alphabetically by path
- `'method'`: sort by HTTP method

**Default:** `None` *Maps to parameter:* `operationsSorter`

## TAGS\_SORTER

Sorting order for tagged operation groups.

- `None`: Swagger UI default ordering
- `'alpha'`: sort alphabetically

**Default:** `None` *Maps to parameter:* `tagsSorter`

## DOC\_EXPANSION

Controls the default expansion setting for the operations and tags.

- `'none'`: everything is collapsed
- `'list'`: only tags are expanded
- `'full'`: all operations are expanded

**Default:** `'list'` *Maps to parameter:* `docExpansion`

## DEEP\_LINKING

Automatically update the fragment part of the URL with permalinks to the currently selected operation.

**Default:** `False` *Maps to parameter:* `deepLinking`

## SHOW\_EXTENSIONS

Show vendor extension (x- . .) fields.

**Default:** `True` *Maps to parameter:* `showExtensions`

## DEFAULT\_MODEL\_RENDERING

Controls whether operations show the model structure or the example value by default.

- `'model'`: show the model fields by default
- `'example'`: show the example value by default

**Default:** `'model'` *Maps to parameter:* `defaultModelRendering`

## DEFAULT\_MODEL\_DEPTH

Controls how many levels are expanded by default when showing nested models.

**Default:** `3` *Maps to parameter:* `defaultModelExpandDepth`

## SHOW\_COMMON\_EXTENSIONS

Controls the display of extensions (pattern, maxLength, minLength, maximum, minimum) fields and values for Parameters.

**Default:** `True` *Maps to parameter:* `showCommonExtensions`

## OAuth2\_REDIRECT\_URL

Used when OAuth2 authentication of API requests via swagger-ui is desired. If `None` is passed, the `oauth2RedirectUrl` parameter will be set to `{% static 'drf-yasg/swagger-ui-dist/oauth2-redirect.html' %}`. This is the default <https://github.com/swagger-api/swagger-ui/blob/master/dist/oauth2-redirect.html> file provided by swagger-ui.

**Default:** `None` *Maps to parameter:* `oauth2RedirectUrl`

## OAuth2\_CONFIG

Used when OAuth2 authentication of API requests via swagger-ui is desired. Provides OAuth2 configuration parameters to the `SwaggerUIBundle#initOAuth` method, and must be a dictionary. See [OAuth2 configuration](#).

**Default:** `{}`

## SUPPORTED\_SUBMIT\_METHODS

List of HTTP methods that have the Try it out feature enabled. An empty array disables Try it out for all operations. This does not filter the operations from the display.

**Default:** `['get', 'put', 'post', 'delete', 'options', 'head', 'patch', 'trace']` *Maps to parameter:* `supportedSubmitMethods`

## DISPLAY\_OPERATION\_ID

Controls the display of `operationId` in operations list.

**Default:** `True` *Maps to parameter:* `displayOperationId`



## 7.2 REDOC\_SETTINGS

### 7.2.1 ReDoc UI settings

ReDoc UI configuration settings. See <https://github.com/Rebilly/ReDoc#configuration>.

#### SPEC\_URL

URL pointing to a swagger document for use by ReDoc. The default behavior is to append `?format=openapi` to the URL which serves the UI; see *note on URL settings* above.

**Default:** None *Maps to attribute:* spec-url

#### LAZY\_RENDERING

If set, enables lazy rendering mode in ReDoc. This mode is useful for APIs with big number of operations (e.g. > 50). In this mode ReDoc shows initial screen ASAP and then renders the rest operations asynchronously while showing progress bar on the top.

**NOTE:** this feature might be removed in future versions of ReDoc (see <https://github.com/Rebilly/ReDoc/issues/475>)

**Default:** False *Maps to attribute:* lazyRendering

#### HIDE\_HOSTNAME

If set, the protocol and hostname is not shown in the operation definition.

**Default:** False *Maps to attribute:* hideHostname

#### EXPAND\_RESPONSES

Specify which responses to expand by default by response codes. Values should be passed as comma-separated list without spaces e.g. `expandResponses="200,201"`. Special value "all" expands all responses by default. Be careful: this option can slow-down documentation rendering time.

**Default:** 'all' *Maps to attribute:* expandResponses

#### PATH\_IN\_MIDDLE

Show path link and HTTP verb in the middle panel instead of the right one.

**Default:** False *Maps to attribute:* pathInMiddlePanel

#### NATIVE\_SCROLLBARS

Use native scrollbar for sidemenu instead of perfect-scroll (scrolling performance optimization for big specs).

**Default:** False *Maps to attribute:* nativeScrollbars

## REQUIRED\_PROPS\_FIRST

Show required properties first ordered in the same order as in required array.

**Default:** `False` *Maps to attribute:* `requiredPropsFirst`

## FETCH\_SCHEMA\_WITH\_QUERY

Fetch the OpenAPI document using the query parameters passed to the ReDoc page request.

**Default:** `True` *Maps to parameter:* -

Contributions are always welcome and appreciated! Here are some ways you can contribute.

### 8.1 Issues

You can and should open an issue for any of the following reasons:

- you found a bug; steps for reproducing, or a pull request with a failing test case will be greatly appreciated
- you wanted to do something but did not find a way to do it after reading the documentation
- you believe the current way of doing something is more complicated or less elegant than it can be
- a related feature that you want is missing from the package

Please always check for existing issues before opening a new issue.

### 8.2 Pull requests

You want to contribute some code? Great! Here are a few steps to get you started:

1. **Fork the repository on GitHub**
2. **Clone your fork and create a branch for the code you want to add**
3. **Create a new virtualenv and install the package in development mode**

```
$ python -m venv venv
$ source venv/bin/activate
(venv) $ python -m pip install -U pip setuptools
(venv) $ pip install -U -e '.[validation]'
(venv) $ pip install -U -r requirements/dev.txt
```

4. **Make your changes and check them against the test project**

```
(venv) $ cd testproj
(venv) $ python manage.py migrate
(venv) $ python manage.py runserver
(venv) $ firefox localhost:8000/swagger/
```

## 5. Update the tests if necessary

You can find them in the `tests` directory.

If your change modifies the expected schema output, you should regenerate the reference schema at `tests/reference.yaml`:

```
(venv) $ python testproj/manage.py generate_swagger tests/reference.yaml --
↪overwrite --user admin --url http://test.local:8002/
```

After checking the git diff to verify that no unexpected changes appeared, you should commit the new `reference.yaml` together with your changes.

## 6. Run tests. The project is setup to use tox and pytest for testing

```
# install test dependencies
(venv) $ pip install -U -r requirements/test.txt
# run tests in the current environment, faster than tox
(venv) $ pytest -n auto --cov
# (optional) sort imports with isort and check flake8 linting
(venv) $ isort --apply
(venv) $ flake8 src/drf_yasg testproj tests setup.py
# (optional) run tests for other python versions in separate environments
(venv) $ tox
```

## 7. Update documentation

If the change modifies behavior or adds new features, you should update the documentation and `README.rst` accordingly. Documentation is written in reStructuredText and built using Sphinx. You can find the sources in the `docs` directory.

To build and check the docs, run

```
(venv) $ tox -e docs
```

## 8. Push your branch and submit a pull request to the master branch on GitHub

Incomplete/Work In Progress pull requests are encouraged, because they allow you to get feedback and help more easily.

## 9. Your code must pass all the required CI jobs before it is merged

As of now, this consists of running on the supported Python, Django, DRF version matrix (see README), and building the docs successfully.

# 8.3 Maintainer's notes

## 8.3.1 Release checklist

- update `docs/changelog.rst` with changes since the last tagged version
- commit & tag the release - `git tag x.x.x -m "Release version x.x.x"`

- push using `git push --follow-tags`
- verify that [Actions](#) has built the tag and successfully published the release to [PyPI](#)
- publish release notes [on GitHub](#)
- start the [ReadTheDocs](#) build if it has not already started
- deploy the live demo [on Heroku](#)



### 9.1 BSD 3-Clause License

Copyright (c) 2017 - 2019, Cristian V. <[cristi@cvjd.me](mailto:cristi@cvjd.me)> All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.





# CHAPTER 10

---

## Changelog

---

### 10.1 1.21.7

*Release date: Jul 20, 2023*

**ADDED:** Added `drf_yasg.inspectors.query.DrfAPICompatInspector` (#857) **ADDED:** Added `DrfAPICompatInspector` to serve as a replacement `CoreAPICompatInspector` (#857) **ADDED:** Allow `DEFAULT_SPEC_RENDERERS` default renderers to be overridden in the settings (#857) **FIXED:** Fixed redoc source mapping (#859)

### 10.2 1.21.6

*Release date: Jun 15, 2023*

**IMPROVED:** Remove required `coreapi` dependency (#854) **IMPROVED:** Feature: Migrate to PyYAML for yaml generator (#845) **FIXED:** Keep path parameters in their given order (#841) **FIXED:** Provide support for enums in codecs (#837)

### 10.3 1.21.5

*Release date: Feb 09, 2023*

**ADDED:** Python 3.10 support (#818) **DEPRECATED:** Python 3.6 support as it's been deprecated by swagger-spec-validator **FIXED:** RecursiveField resolver (#822)

### 10.4 1.21.4

*Release date: Sep 26, 2022*

**FIXED:** Remove NullBooleanFields if the django-rest-framework version  $\geq 3.14.0$  (#814)

## 10.5 1.21.3

*Release date: Jul 18, 2022*

**FIXED:** Set generator url for `swagger_settings.DEFAULT_API_URL` (#682) **FIXED:** Check fields for `allow_null` attribute (#688) **FIXED:** Encode `pytz` object field as a string by default (#717) **FIXED:** Handle errors rendering with `TemplateHTMLRenderer` (#742)

## 10.6 1.21.2

*Release date: Jul 18, 2022*

**FIXED:** Fixed code block rst syntax in `README.rst`

## 10.7 1.21.1

*Release date: Jul 17, 2022*

**FIXED:** Refer to `permission_classes` as a tuple (#678) **IMPROVED:** Document drf-extra-fields base64 integration (#445) **ADDED:** Added many support to example code (#695) **ADDED:** Allow specifying response as a reference (#757) **FIXED:** Fix old spelling errors and add a `cspell` configuration (#796) **FIXED:** Remove universal wheel, python 2 is unsupported (#782) **FIXED:** Fix duration field inspector (#549)

## 10.8 1.21.0

*Release date: Jul 14, 2022*

- **IMPROVED:** Add utf-8 support to `yaml` loaders (#692)

## 10.9 1.20.3

*Release date: Jul 14, 2022*

- **FIXED:** Source mapping in `redoc.min.js` (#778)
- **FIXED:** Publish action tag pattern in `publish.yml` (#794)

## 10.10 1.20.0

*Release date: Oct 25, 2020*

- **IMPROVED:** updated `swagger-ui` to version 3.36.0
- **IMPROVED:** updated `ReDoc` to version 2.0.0-rc.40
- **FIXED:** fixed compatibility with Django Rest Framework 3.12

- **FIXED:** fixed compatibility with Python 3.9 typing generics
- **FIXED:** dropped support for obsolete `django.conf.settings.LOGOUT_URL` (#646)

Support was dropped for Python 2.7, DRF 3.8, DRF 3.9.

Requirements are now: Python>=3.6, Django>=2.2, DRF>=3.10

The 1.18 and 1.19 series was skipped to avoid confusion with the drf-yasg2 fork. I would also like to take this opportunity to extend my apologies to the community at large for the large gap in the maintenance of drf-yasg and the problems it has caused.

## 10.11 1.17.1

*Release date: Feb 17, 2020*

- **FIXED:** fixed compatibility issue with `CurrentUserDefault` in Django Rest Framework 3.11
- **FIXED:** respect `USERNAME_FIELD` in `generate_swagger` command (#486)

Support was dropped for Python 3.5, Django 2.0, Django 2.1, DRF 3.7

## 10.12 1.17.0

*Release date: Oct 03, 2019*

- **ADDED:** added `JSONFieldInspector` for `JSONField` support (#417)
- **IMPROVED:** updated `swagger-ui` to version 3.23.11
- **IMPROVED:** updated `ReDoc` to version 2.0.0-rc.14 (#398)
- **FIXED:** fixed a type hint support issue (#428, #450)
- **FIXED:** fixed packaging issue caused by a missing requirement (#412)

## 10.13 1.16.1

*Release date: Jul 16, 2019*

- **IMPROVED:** better enum type detection for nested `ChoiceFields` (#400)
- **FIXED:** fixed DRF 3.10 compatibility (#408, #410, #411)

## 10.14 1.16.0

*Release date: Jun 13, 2019*

- **ADDED:** added `reference_resolver_class` attribute hook to `SwaggerAutoSchema` (#350)
- **ADDED:** added `operation_keys` attribute to `SwaggerAutoSchema`, along with `__init__` parameter (#355)
- **FIXED:** fixed potential crash on `issubclass` check without `isclass` check

## 10.15 1.15.1

*Release date: Jun 13, 2019*

- **IMPROVED:** updated `swagger-ui` to version 3.22.3
- **IMPROVED:** updated `ReDoc` to version 2.0.0-rc.8-1
- **FIXED:** fixed an issue with inspection of typing hints on Python 2.7 (#363)
- **FIXED:** fixed an issue with inspection of typing hints on Python 3.7 (#371)

**Python 3.4 support has been dropped!**

## 10.16 1.15.0

*Release date: Apr 01, 2019*

- **ADDED:** added `is_list_view` and `has_list_response` extension points to `SwaggerAutoSchema` (#331)
- **IMPROVED:** updated `swagger-ui` to version 3.22.0
- **IMPROVED:** updated `ReDoc` to version 2.0.0-rc.4
- **FIXED:** `ListModelMixin` will now always be treated as a list view (#306)
- **FIXED:** non-primitive values in field `choices` will now be handled properly (#340)

## 10.17 1.14.0

*Release date: Mar 04, 2019*

- **IMPROVED:** updated `swagger-ui` to version 3.21.0
- **FIXED:** implicit `ref_name` collisions will now throw an exception
- **FIXED:** `RecursiveField` will now also work as a child of `ListSerializer` (#321)
- **FIXED:** fixed `minLength` and `maxLength` for `ListSerializer` and `ListField`
- **FIXED:** the `items` property of `Schema`, `Parameter` and `Items` objects was renamed to `items_`; this is a *mildly breaking change* and was needed to fix the collision with the `items` method of `dict` (#308)
- **REMOVED:** the `get_summary` and `get_description` methods have been removed (previously deprecated in 1.12.0)

## 10.18 1.13.0

*Release date: Jan 29, 2019*

- **IMPROVED:** type hint inspection is now supported for collections and `Optional` (#272)
- **IMPROVED:** updated `swagger-ui` to version 3.20.5
- **IMPROVED:** updated `ReDoc` to version 2.0.0-rc.2

- **DEPRECATED:** quietly dropped support for the `flex` validator; it will still work if the library is installed, but the `setup.py` requirement was removed and the validator will be silently skipped if not installed (#285)

## 10.19 1.12.1

*Release date: Dec 28, 2018*

- **IMPROVED:** updated ReDoc to version 2.0.0-rc.0
- **FIXED:** management command will now correctly fall back to `DEFAULT_VERSION` for mock request
- **FIXED:** fixed bad “raised exception during schema generation” warnings caused by missing `self` parameter

## 10.20 1.12.0

*Release date: Dec 23, 2018*

- **ADDED:** `get_security_definitions` and `get_security_requirements` hooks to `OpenAPISchemaGenerator`
- **ADDED:** added `get_summary_and_description` and `split_summary_from_description` extension points to `SwaggerAutoSchema` to allow for better customization
- **IMPROVED:** updated `swagger-ui` to version 3.20.4
- **IMPROVED:** `paginator` `next` and `previous` fields are now marked as `x-nullable` (#263)
- **IMPROVED:** added the `tags` argument to `swagger_auto_schema` (#259)
- **IMPROVED:** type of `enum` will now be automatically detected from `ChoiceField` if all `choices` values are objects of the same Python class (#264)
- **IMPROVED:** `SwaggerValidationError` details will now be logged and shown in the exception message
- **FIXED:** user implementations of `get_queryset`, `get_parsers` and `get_renderers` will no longer be bypassed
- **FIXED:** fixed handling of lazy objects in user-supplied values
- **FIXED:** `read_only` serializer fields will be correctly ignored when generating form parameters (#261)
- **FIXED:** fixed incorrect return type from `UIRenderer` (#268)
- **FIXED:** fixed inconsistent ordering of `global securityDefinitions` and `security` objects
- **DEPRECATED:** the `get_summary` and `get_description` extension points have been deprecated in favor of the new `get_summary_and_description`, and will be removed in a future release

### IMPORTANT PACKAGING NOTE

Starting with this version, the `setup_requires` argument was dropped from `setup.py` in favor of `build-system.requires` in `pyproject.toml`. This means that for correctly building or installing from `sdist`, you will need to use a PEP517/PEP518 compliant tool (`tox>=3.3.0`, `setuptools>=40`, `pip>=10.0`, `pep517.build`) or manually install the build requirements yourself (just `setuptools` and `setuptools-scm`, for now).

Additionally, for correct package version detection, a full git checkout is required when building (this was always the case). Building without `.git` or without `setuptools-scm` will result in a distribution with a version like `drf-yasg-1!0.0.0.dev0+noscm.00000167d19bd859`.

## 10.21 1.11.1

*Release date: Nov 29, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.20.1
- **IMPROVED:** updated `ReDoc` to version 2.0.0-alpha.41
- **FIXED:** `minLength` and `maxLength` will now also work for `ListSerializer` in addition to `ListField`
- **FIXED:** `MultipleChoiceField` will now use the `multi collectionFormat` where appropriate (#257)
- **FIXED:** the `format`, `pattern`, `enum`, `min_length` and `max_length` attributes of `coreschema.Schema` will now be persisted into the converted `openapi.Parameter` (#212, #233)

## 10.22 1.11.0

*Release date: Oct 14, 2018*

- **ADDED:** `PERSIST_AUTH`, `REFETCH_SCHEMA_WITH_AUTH`, `REFETCH_SCHEMA_ON_LOGOUT` settings and related javascript implementation for persisting authentication data to `swagger-ui` `localStorage`
- **IMPROVED:** UI-enabled views will now no longer generate the full specification document twice; the HTML part of the view will only generate a barebones Swagger object with no paths and definitions
- **IMPROVED:** added the `FETCH_SCHEMA_WITH_QUERY` setting to enable fetching of the schema document using query parameters passed to the UI view (#208)
- **IMPROVED:** added support for the very common `x-nullable` extension (#217)
- **IMPROVED:** extensibility of some classes was improved by adding more extension points, together with more blocks for `swagger-ui.html/redoc.html` and some JavaScript hooks in `swagger-ui-init.js`
- **FIXED:** removed usage of `inspect.signature` on python 2.7 (#222)

## 10.23 1.10.2

*Release date: Sep 13, 2018*

- **ADDED:** added the `DISPLAY_OPERATION_ID` `swagger-ui` setting
- **IMPROVED:** updated `ReDoc` to version 2.0.0-alpha.38
- **IMPROVED:** Operation summary will now be parsed from multi-line view method docstrings (#205)
- **IMPROVED:** `pattern` will now work on any field with a `RegexValidator` (would previously not appear on fields with special formats such as `EmailField`)
- **FIXED:** fixed an issue with `RelatedFieldInspector` handling of nested serializers
- **FIXED:** fixed handling of `reverse_lazy` in URL settings (#209)

## 10.24 1.10.1

*Release date: Sep 10, 2018*

- **ADDED:** added the `SPEC_URL` setting for controlling the download link in `swagger-ui` and `ReDoc`
- **ADDED:** updated `ReDoc` settings (added `NATIVE_SCROLLBARS` and `REQUIRED_PROPS_FIRST`)
- **ADDED:** added `extra_styles` and `extra_scripts` blocks to `ui` templates (#178)
- **IMPROVED:** updated `swagger-ui` to version 3.18.2
- **IMPROVED:** updated `ReDoc` to version 2.0.0-alpha.37
- **FIXED:** stopped generating invalid OpenAPI by improper placement of `readOnly` Schemas
- **FIXED:** fixed broken CSS when `USE_SESSION_AUTH=False`
- **FIXED:** fixed implementation of `operation_summary` and deprecated (#194, #198)
- **FIXED:** fixed a bug related to nested `typing` hints (#195)
- **FIXED:** removed dependency on `future` (#196)
- **FIXED:** fixed exceptions logged for fields with `default=None` (#203)
- **FIXED:** fixed `request_body=no_body` handling and related tests (#188, #199)

## 10.25 1.10.0

*Release date: Aug 08, 2018*

- **ADDED:** added `EXCLUDED_MEDIA_TYPES` setting for controlling produces MIME type filtering (#158)
- **ADDED:** added support for `SerializerMethodField`, via the `swagger_serializer_method` decorator for the method field, and support for Python 3.5 style type hinting of the method field return type (#137, #175, #179)

*NOTE:* in order for this to work, you will have to add the new `drf_yasg.inspectors.SerializerMethodFieldInspector` to your `DEFAULT_FIELD_INSPECTORS` array if you changed it from the default value

- **IMPROVED:** updated `swagger-ui` to version 3.18.0
- **IMPROVED:** added support for Python 3.7 and Django 2.1 (#176)
- **IMPROVED:** `swagger_schema_fields` will now also work on `serializer Fields` (#167)
- **IMPROVED:** `ref_name` collisions will now log a warning message (#156)
- **IMPROVED:** added `operation_summary` and deprecated arguments to `swagger_auto_schema` (#149, #173)
- **FIXED:** made `swagger_auto_schema` work with DRF 3.9 `@action` mappings (#177)

## 10.26 1.9.2

*Release date: Aug 03, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.17.6

- **IMPROVED:** updated ReDoc to version 2.0.0-alpha.32
- **IMPROVED:** added `--api-version` argument to the `generate_swagger` management command (#170)
- **FIXED:** corrected various documentation typos (#160, #162, #171, #172)
- **FIXED:** made `generate_swagger` work for projects without authentication (#161)
- **FIXED:** fixed `SafeText` interaction with YAML codec (#159)

## 10.27 1.9.1

*Release date: Jun 30, 2018*

- **IMPROVED:** added a `swagger_fake_view` marker to more easily detect mock views in view methods; `getattr(self, 'swagger_fake_view', False)` inside a view method like `get_serializer_class` will tell you if the view instance is being used for swagger schema introspection (#154)
- **IMPROVED:** updated `swagger-ui` to version 3.17.1
- **IMPROVED:** updated ReDoc to version 2.0.0-alpha.25
- **FIXED:** fixed wrong handling of duplicate urls in `urlconf` (#155)
- **FIXED:** fixed crash when passing `None` as a response override (#148)

## 10.28 1.9.0

*Release date: Jun 16, 2018*

- **ADDED:** added `DEFAULT_GENERATOR_CLASS` setting and `--generator-class` argument to the `generate_swagger` management command (#140)
- **FIXED:** fixed wrongly required `'count'` response field on `CursorPagination` (#141)
- **FIXED:** fixed some cases where `swagger_schema_fields` would not be handled (#142)
- **FIXED:** fixed crash when encountering `coreapi.Fieldss` without a schema (#143)

## 10.29 1.8.0

*Release date: Jun 01, 2018*

- **ADDED:** added a `swagger_schema_fields` field on serializer `Meta` classes for customizing schema generation (#132, #134)
- **FIXED:** error responses from schema views are now rendered with `JSONRenderer` instead of throwing confusing errors (#130, #58)
- **FIXED:** `readOnly` schema fields will now no longer be marked as required (#133)



## 10.30 1.7.4

*Release date: May 14, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.14.2
- **IMPROVED:** updated `ReDoc` to version 2.0.0-alpha.20
- **FIXED:** ignore `None` return from `get_operation` to avoid empty `Path` objects in output
- **FIXED:** request body is now allowed on `DELETE` endpoints (#118)

## 10.31 1.7.3

*Release date: May 12, 2018*

- **FIXED:** views whose `__init__` methods throw exceptions will now be ignored during endpoint enumeration

## 10.32 1.7.2

*Release date: May 12, 2018*

- **FIXED:** fixed generation of default `SECURITY_REQUIREMENTS` to match documented behavior
- **FIXED:** ordering of `SECURITY_REQUIREMENTS` and `SECURITY_DEFINITIONS` is now stable

## 10.33 1.7.1

*Release date: May 05, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.14.1
- **IMPROVED:** set `swagger-ui showCommonExtensions` to `True` by default and add `SHOW_COMMON_EXTENSIONS` setting key
- **IMPROVED:** set `min_length=1` when `allow_blank=False` (#112, thanks to @elnappo)
- **FIXED:** made documentation ordering of `SwaggerDict` extra attributes stable

## 10.34 1.7.0

*Release date: Apr 27, 2018*

- **ADDED:** added integration with `django-rest-framework-recursive` (#109, #110, thanks to @rsichny)  
*NOTE:* in order for this to work, you will have to add the new `drf_yasg.inspectors.RecursiveFieldInspector` to your `DEFAULT_FIELD_INSPECTORS` array if you changed it from the default value
- **FIXED:** `SchemaRef` now supports cyclical references via the `ignore_unresolved` argument

## 10.35 1.6.2

*Release date: Apr 25, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.13.6
- **IMPROVED:** switched `ReDoc` to version 2.0.0-alpha.17 (was 1.21.2); fixes [#107](#)
- **FIXED:** made documentation ordering of parameters stable for urls with multiple parameters ([#105](#), [#106](#))
- **FIXED:** fixed crash when using a model `ChoiceField` of unknown child type

## 10.36 1.6.1

*Release date: Apr 01, 2018*

- **ADDED:** added `SUPPORTED_SUBMIT_METHODS` `swagger-ui` setting

## 10.37 1.6.0

*Release date: Mar 24, 2018*

- **IMPROVED:** `OAUTH2_REDIRECT_URL` will now default to the built in `oauth2-redirect.html` file

## 10.38 1.5.1

*Release date: Mar 18, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.13.0
- **FIXED:** fixed a crash caused by `serializers.OneToOneRel` ([#81](#), thanks to [@ko-pp](#))

## 10.39 1.5.0

*Release date: Mar 12, 2018*

- **IMPROVED:** `serializers.HiddenField` are now hidden ([#78](#), [#79](#), thanks to [@therefromhere](#))  
*NOTE:* in order for this to work, you will have to add the new `drf_yasg.inspectors.HiddenFieldInspector` to your `DEFAULT_FIELD_INSPECTORS` array if you changed it from the default value
- **IMPROVED:** type of model field is now detected for `serializers.SlugRelatedField` with `read_only=True` ([#82](#), [#83](#), thanks to [@therefromhere](#))

## 10.40 1.4.7

*Release date: Mar 05, 2018*

- **FIXED:** prevent crashes caused by attempting to delete object attributes which do not exist in the first place ([#76](#))

## 10.41 1.4.6

*Release date: Mar 05, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.12.0
- **IMPROVED:** updated `ReDoc` to version 1.21.2

## 10.42 1.4.5

*Release date: Mar 05, 2018*

- **FIXED:** fixed an issue with modification of `swagger_auto_schema` arguments in-place during introspection, which would sometimes cause an incomplete Swagger document to be generated after the first pass (#74, #75)

## 10.43 1.4.4

*Release date: Feb 26, 2018*

- **IMPROVED:** type for `ChoiceField` generated by a `ModelSerializer` from a model field with `choices=...` will now be set according to the associated model field (#69)
- **FIXED:** `lookup_field` and `lookup_value_regex` on the same `ViewSet` will no longer trigger an exception (#68)

## 10.44 1.4.3

*Release date: Feb 22, 2018*

- **FIXED:** added a missing assignment that would cause the default argument to `openapi.Parameter.__init__` to be ignored

## 10.45 1.4.2

*Release date: Feb 22, 2018*

- **FIXED:** fixed a bug that causes a `ModelViewSet` generated from models with nested `ForeignKey` to output models named `Nested` into the definitions section (#59, #65)
- **FIXED:** Response objects without a schema are now properly handled when passed through `swagger_auto_schema` (#66)

## 10.46 1.4.1

*Release date: Feb 21, 2018*

- **FIXED:** the `coerce_to_string` is now respected when setting the type, default value and min/max values of `DecimalField` in the OpenAPI schema (#62)

- **FIXED:** error responses from web UI views are now rendered with `TemplateHTMLRenderer` instead of throwing confusing errors (#58)
- **IMPROVED:** updated `swagger-ui` to version 3.10.0
- **IMPROVED:** updated `ReDoc` to version 1.21.0

## 10.47 1.4.0

*Release date: Feb 04, 2018*

- **ADDED:** added settings for OAuth2 client configuration in `swagger-ui` (#53)
- **IMPROVED:** updated `swagger-ui` to version 3.9.3

## 10.48 1.3.1

*Release date: Jan 24, 2018*

- **FIXED:** fixed a bug that would sometimes cause endpoints to wrongly be output as form operations (#50)
- **IMPROVED:** added generation of `produces` based on renderer classes
- **IMPROVED:** added generation of top-level `consumes` and `produces` based on `DEFAULT_PARSER_CLASSES` and `DEFAULT_RENDERER_CLASSES` (#48)

## 10.49 1.3.0

*Release date: Jan 23, 2018*

- **ADDED:** security requirements are now correctly set and can be customized; this should fix problems related to authentication in `swagger-ui` Try it out! (#50, #54)
- **IMPROVED:** updated `swagger-ui` to version 3.9.2
- **IMPROVED:** updated `ReDoc` to version 1.20.0
- **FIXED:** fixed an exception caused by a warning in `get_path_from_regex` (#49, thanks to @blueyed)

## 10.50 1.2.2

*Release date: Jan 12, 2018*

- **FIXED:** `django>=3.7.7` is now required because of breaking changes (#44, #45, thanks to @hiro-kawa)

## 10.51 1.2.1

*Release date: Jan 12, 2018*

- Fixed deployment issues

## 10.52 1.2.0

*Release date: Jan 12, 2018 (missing from PyPI due to deployment issues)*

- **ADDED:** `basePath` is now generated by taking into account the `SCRIPT_NAME` variable and the longest common prefix of API urls (#37, #42)
- **IMPROVED:** removed inline scripts and styles from bundled HTML templates to increase CSP compatibility
- **IMPROVED:** improved validation errors and added more assertion sanity checks (#37, #40)
- **IMPROVED:** improved handling of `NamespaceVersioning` by excluding endpoints of differing versions (i.e. when accessing the schema view for v1, v2 endpoints will not be included in swagger)

## 10.53 1.1.3

*Release date: Jan 02, 2018*

- **FIXED:** schema view cache will now always Vary on the Cookie and Authentication (the Vary header was previously only added if `public` was set to `True`) - this fixes issues related to Django authentication in `swagger-ui` and `CurrentUserDefault` values in the schema

## 10.54 1.1.2

*Release date: Jan 01, 2018*

- **IMPROVED:** updated `swagger-ui` to version 3.8.1
- **IMPROVED:** removed some unneeded static files

## 10.55 1.1.1

*Release date: Dec 27, 2017*

- **ADDED:** `generate_swagger management command` (#29, #31, thanks to @beaugunderson)
- **FIXED:** fixed improper generation of `\Z` regex tokens - will now be replaced by `$`

## 10.56 1.1.0

*Release date: Dec 27, 2017*

- **ADDED:** added support for APIs versioned with `URLPathVersioning` or `NamespaceVersioning`
- **ADDED:** added ability to recursively customize schema generation *using pluggable inspector classes*
- **ADDED:** added `operation_id` parameter to `@swagger_auto_schema`
- **ADDED:** integration with `django-rest-framework-camel-case` (#28)
- **IMPROVED:** strings, arrays and integers will now have min/max validation attributes inferred from the field-level validators

- **FIXED:** fixed a bug that caused `title` to never be generated for Schemas; `title` is now correctly populated from the field's `label` property

## 10.57 1.0.6

*Release date: Dec 23, 2017*

- **FIXED:** Swagger UI “Try it out!” should now work with Django login
- **FIXED:** callable default values on serializer fields will now be properly called (#24, #25)
- **IMPROVED:** updated `swagger-ui` to version 3.8.0
- **IMPROVED:** `PrimaryKeyRelatedField` and `SlugRelatedField` will now have appropriate types based on the related model (#26)
- **IMPROVED:** mock views will now have a bound request even with `public=False` (#23)

## 10.58 1.0.5

*Release date: Dec 18, 2017*

- **FIXED:** fixed a crash caused by having read-only Serializers nested by reference
- **FIXED:** removed erroneous backslashes in paths when routes are generated using Django 2 `path()`
- **IMPROVED:** updated `swagger-ui` to version 3.7.0
- **IMPROVED:** `FileField` is now generated as an URL or file name in response Schemas (#21, thanks to @h-hirokawa)

## 10.59 1.0.4

*Release date: Dec 16, 2017*

- **FIXED:** fixed improper generation of YAML references
- **ADDED:** added `query_serializer` parameter to `@swagger_auto_schema` (#16, #17)

## 10.60 1.0.3

*Release date: Dec 15, 2017*

- **FIXED:** fixed bug that caused schema views returned from cache to fail (#14)
- **FIXED:** disabled automatic generation of response schemas for form operations to avoid confusing errors caused by attempting to shove file parameters into Schema objects

## 10.61 1.0.2

*Release date: Dec 13, 2017*

- First published version

- [genindex](#)
- [modindex](#)
- [search](#)

## 11.1 drf\_yasg package

### 11.1.1 drf\_yasg.codecs

`drf_yasg.codecs._validate_flex(spec)`

`drf_yasg.codecs._validate_swagger_spec_validator(spec)`

`drf_yasg.codecs.VALIDATORS = {'flex': <function <lambda>>, 'ssv': <function _validate_swagger_spec_validator>}`

**class** `drf_yasg.codecs._OpenAPICodec(validators)`

Bases: `object`

**media\_type** = `None`

**validators**

List of validator names to apply

**encode** (*document*)

Transform an *Swagger* object to a sequence of bytes.

Also performs validation and applies settings.

**Parameters** *document* (`openapi.Swagger`) – Swagger spec object as generated by *OpenAPISchemaGenerator*

**Returns** binary encoding of document

**Return type** bytes

**encode\_error** (*err*)

Dump an error message into an encoding-appropriate sequence of bytes

**\_dump\_dict** (*spec*)

Dump the given dictionary into its string representation.

**Parameters** *spec* (*dict*) – a python dict

**Returns** string representation of *spec*

**Return type** str or bytes

**generate\_swagger\_object** (*swagger*)

Generates the root Swagger object.

**Parameters** *swagger* (*openapi.Swagger*) – Swagger spec object as generated by *OpenAPISchemaGenerator*

**Returns** swagger spec as dict

**Return type** OrderedDict

**class** *drf\_yasg.codecs.OpenAPICodecJson* (*validators*, *pretty=False*, *media\_type='application/json'*)

Bases: *drf\_yasg.codecs.\_OpenAPICodec*

**media\_type** = 'application/json'

**\_dump\_dict** (*spec*)

Dump spec into JSON.

**Return type** str

*drf\_yasg.codecs.yaml\_sane\_dump* (*data*, *binary*)

Dump the given data dictionary into a sane format:

- OrderedDicts are dumped as regular mappings instead of non-standard !!odict
- multi-line mapping style instead of json-like inline style
- list elements are indented into their parents
- YAML references/aliases are disabled

**Parameters**

• **data** (*dict*) – the data to be dumped

• **binary** (*bool*) – True to return a utf-8 encoded binary object, False to return a string

**Returns** the serialized YAML

**Return type** str or bytes

*drf\_yasg.codecs.yaml\_sane\_load* (*stream*)

Load the given YAML stream while preserving the input order for mapping items.

**Parameters** *stream* – YAML stream (can be a string or a file-like object)

**Return type** OrderedDict

**class** *drf\_yasg.codecs.OpenAPICodecYaml* (*validators*, *media\_type='application/yaml'*)

Bases: *drf\_yasg.codecs.\_OpenAPICodec*

**media\_type** = 'application/yaml'

**\_dump\_dict** (*spec*)

Dump spec into YAML.

**Return type** bytes



### 11.1.2 drf\_yasg.errors

**exception** `drf_yasg.errors.SwaggerError`

Bases: `Exception`

**exception** `drf_yasg.errors.SwaggerValidationError` (*msg*, *errors=None*, *spec=None*, *source\_codec=None*, \*args)

Bases: `drf_yasg.errors.SwaggerError`

**exception** `drf_yasg.errors.SwaggerGenerationError`

Bases: `drf_yasg.errors.SwaggerError`

### 11.1.3 drf\_yasg.generators

`drf_yasg.generators.common_path` (*paths*)

`drf_yasg.generators.is_custom_action` (*action*)

**class** `drf_yasg.generators.EndpointEnumerator` (*patterns=None*, *urlconf=None*, *request=None*)

Bases: `rest_framework.schemas.generators.EndpointEnumerator`

**get\_path\_from\_regex** (*path\_regex*)

Given a URL conf regex, return a URI template string.

**should\_include\_endpoint** (*path*, *callback*, *app\_name=""*, *namespace=""*, *url\_name=None*)

Return *True* if the given endpoint should be included.

**replace\_version** (*path*, *callback*)

If `request.version` is not *None* and *callback* uses `URLPathVersioning`, this function replaces the version parameter in *path* with the actual version.

#### Parameters

- **path** (*str*) – the templated path
- **callback** – the view callback

#### Return type

**get\_api\_endpoints** (*patterns=None*, *prefix=""*, *app\_name=None*, *namespace=None*, *ignored\_endpoints=None*)

Return a list of all available API endpoints by inspecting the URL conf.

Copied entirely from super.

**unescape** (*s*)

Unescape all backslash escapes from *s*.

**Parameters** *s* (*str*) – string with backslash escapes

**Return type** *str*

**unescape\_path** (*path*)

Remove backslashes escapes from all path components outside {parameters}. This is needed because `simplify_regex` does not handle this correctly.

**NOTE:** this might destructively affect some url regex patterns that contain metacharacters (e.g. `w`, `d`) outside path parameter groups; if you are in this category, God help you

**Parameters** *path* (*str*) – path possibly containing

**Returns** the unescaped path

**Return type** str

**class** drf\_yasg.generators.OpenAPISchemaGenerator(*info*, *version=""*, *url=None*, *patterns=None*, *urlconf=None*)

Bases: object

This class iterates over all registered API endpoints and returns an appropriate OpenAPI 2.0 compliant schema. Method implementations shamelessly stolen and adapted from rest-framework SchemaGenerator.

**Parameters**

- **info** (*openapi.Info*) – information about the API
- **version** (*str*) – API version string; if omitted, *info.default\_version* will be used
- **url** (*str*) – API scheme, host and port; if *None* is passed and *DEFAULT\_API\_URL* is not set, the url will be inferred from the request made against the schema view, so you should generally not need to set this parameter explicitly; if the empty string is passed, no host and scheme will be emitted

If *url* is not *None* or the empty string, it must be a scheme-absolute uri (i.e. starting with <http://> or <https://>), and any path component is ignored;

See also: [documentation on base URL construction](#)

- **patterns** – if given, only these patterns will be enumerated for inclusion in the API spec
- **urlconf** – if patterns is not given, use this urlconf to enumerate patterns; if not given, the default urlconf is used

**endpoint\_enumerator\_class**

alias of *EndpointEnumerator*

**reference\_resolver\_class**

alias of *drf\_yasg.openapi.ReferenceResolver*

**default\_mapping** = {'delete': 'destroy', 'get': 'retrieve', 'patch': 'partial\_update', 'url': 'url'}

**get\_security\_definitions()**

Get the security schemes for this API. This determines what is usable in security requirements, and helps clients configure their authorization credentials.

**Returns** the security schemes usable with this API

**Return type** dict[str,dict] or None

**get\_security\_requirements** (*security\_definitions*)

Get the base (global) security requirements of the API. This is never called if *get\_security\_definitions()* returns *None*.

**Parameters** **security\_definitions** – security definitions as returned by *get\_security\_definitions()*

**Returns** the security schemes accepted by default

**Return type** list[dict[str,list[str]]] or None

**get\_schema** (*request=None*, *public=False*)

Generate a *Swagger* object representing the API schema.

**Parameters**

- **request** (*rest\_framework.request.Request* or *None*) – the request used for filtering accessible endpoints and finding the spec URI

- **public** (*bool*) – if True, all endpoints are included regardless of access through *request*

**Returns** the generated Swagger specification

**Return type** *openapi.Swagger*

**create\_view** (*callback, method, request=None*)

Create a view instance from a view callback as registered in urlpatterns.

**Parameters**

- **callback** – view callback registered in urlpatterns
- **method** (*str*) – HTTP method
- **request** (*rest\_framework.request.Request* or *None*) – request to bind to the view

**Returns** the view instance

**coerce\_path** (*path, view*)

Coerce {pk} path arguments into the name of the model field, where possible. This is cleaner for an external representation (i.e. “this is an identifier”, not “this is a database primary key”).

**Parameters**

- **path** (*str*) – the path
- **view** (*rest\_framework.views.APIView*) – associated view

**Return type** *str*

**get\_endpoints** (*request*)

Iterate over all the registered endpoints in the API and return a fake view with the right parameters.

**Parameters** **request** (*rest\_framework.request.Request* or *None*) – request to bind to the endpoint views

**Returns** {path: (view\_class, list[(http\_method, view\_instance)])}

**Return type** dict[str,(type,list[(str,rest\_framework.views.APIView)])]

**get\_operation\_keys** (*subpath, method, view*)

Return a list of keys that should be used to group an operation within the specification.

```

/users/                                ("users", "list"), ("users", "create")
/users/{pk}/                          ("users", "read"), ("users", "update"), ("users",
↪ "delete")
/users/enabled/                      ("users", "enabled") # custom viewset list action
/users/{pk}/star/                   ("users", "star") # custom viewset detail_
↪ action
/users/{pk}/groups/                 ("users", "groups", "list"), ("users", "groups",
↪ "create")
/users/{pk}/groups/{pk}/            ("users", "groups", "read"), ("users", "groups",
↪ "update")

```

**Parameters**

- **subpath** (*str*) – path to the operation with any common prefix/base path removed
- **method** (*str*) – HTTP method
- **view** – the view associated with the operation

**Return type** `list[str]`

**determine\_path\_prefix** (*paths*)

Given a list of all paths, return the common prefix which should be discounted when generating a schema structure.

This will be the longest common string that does not include that last component of the URL, or the last component before a path parameter.

For example:

```
/api/v1/users/  
/api/v1/users/{pk}/
```

The path prefix is `/api/v1/`.

**Parameters** **paths** (*list[str]*) – list of paths

**Return type** `str`

**should\_include\_endpoint** (*path, method, view, public*)

Check if a given endpoint should be included in the resulting schema.

**Parameters**

- **path** (*str*) – request path
- **method** (*str*) – http request method
- **view** – instantiated view callback
- **public** (*bool*) – if True, all endpoints are included regardless of access through *request*

**Returns** true if the view should be excluded

**Return type** `bool`

**get\_paths\_object** (*paths*)

Construct the Swagger Paths object.

**Parameters** **paths** (*OrderedDict[str, openapi.PathItem]*) – mapping of paths to *PathItem* objects

**Returns** the *Paths* object

**Return type** *openapi.Paths*

**get\_paths** (*endpoints, components, request, public*)

Generate the Swagger Paths for the API from the given endpoints.

**Parameters**

- **endpoints** (*dict*) – endpoints as returned by `get_endpoints`
- **components** (*ReferenceResolver*) – resolver/container for Swagger References
- **request** (*Request*) – the request made against the schema view; can be None
- **public** (*bool*) – if True, all endpoints are included regardless of access through *request*

**Returns** the *Paths* object and the longest common path prefix, as a 2-tuple

**Return type** `tuple[openapi.Paths, str]`

**get\_operation** (*view, path, prefix, method, components, request*)

Get an *Operation* for the given API endpoint (path, method). This method delegates to *get\_operation()* of a *ViewInspector* determined according to settings and *@swagger\_auto\_schema* overrides.

**Parameters**

- **view** – the view associated with this endpoint
- **path** (*str*) – the path component of the operation URL
- **prefix** (*str*) – common path prefix among all endpoints
- **method** (*str*) – the http method of the operation
- **components** (*openapi.ReferenceResolver*) – referenceable components
- **request** (*Request*) – the request made against the schema view; can be None

**Return type** *openapi.Operation*

**get\_path\_item** (*path, view\_cls, operations*)

Get a *PathItem* object that describes the parameters and operations related to a single path in the API.

**Parameters**

- **path** (*str*) – the path
- **view\_cls** (*type*) – the view that was bound to this path in urlpatterns
- **operations** (*dict[str, openapi.Operation]*) – operations defined on this path, keyed by lowercase HTTP method

**Return type** *openapi.PathItem*

**get\_overrides** (*view, method*)

Get overrides specified for a given operation.

**Parameters**

- **view** – the view associated with the operation
- **method** (*str*) – HTTP method

**Returns** a dictionary containing any overrides set by *@swagger\_auto\_schema*

**Return type** dict

**get\_path\_parameters** (*path, view\_cls*)

Return a list of *Parameter* instances corresponding to any templated path variables.

**Parameters**

- **path** (*str*) – templated request path
- **view\_cls** (*type*) – the view class associated with the path

**Returns** path parameters

**Return type** list[*openapi.Parameter*]

### 11.1.4 drf\_yasg.inspectors

`drf_yasg.inspectors.NotHandled = <object object>`

The base class of the class hierarchy.

When called, it accepts no arguments and returns a new featureless instance that has no instance attributes and cannot be given any.

**class** `drf_yasg.inspectors.BaseInspector` (*view, path, method, components, request*)

Bases: `object`

**Parameters**

- **view** (*rest\_framework.views.APIView*) – the view associated with this endpoint
- **path** (*str*) – the path component of the operation URL
- **method** (*str*) – the http method of the operation
- **components** (*openapi.ReferenceResolver*) – referenceable components
- **request** (*rest\_framework.request.Request*) – the request made against the schema view; can be `None`

**get\_parser\_classes** ()

Get the parser classes of this view by calling *get\_parsers*.

**Returns** parser classes

**Return type** `list[type[rest_framework.parsers.BaseParser]]`

**get\_renderer\_classes** ()

Get the renderer classes of this view by calling *get\_renderers*.

**Returns** renderer classes

**Return type** `list[type[rest_framework.renderers.BaseRenderer]]`

**probe\_inspectors** (*inspectors, method\_name, obj, initkwargs=None, \*\*kwargs*)

Probe a list of inspectors with a given object. The first inspector in the list to return a value that is not *NotHandled* wins.

**Parameters**

- **inspectors** (*list[type[BaseInspector]]*) – list of inspectors to probe
- **method\_name** (*str*) – name of the target method on the inspector
- **obj** – first argument to inspector method
- **initkwargs** (*dict*) – extra kwargs for instantiating inspector class
- **kwargs** – additional arguments to inspector method

**Returns** the return value of the winning inspector, or `None` if no inspector handled the object

**process\_result** (*result, method\_name, obj, \*\*kwargs*)

After an inspector handles an object (i.e. returns a value other than *NotHandled*), all inspectors that were probed get the chance to alter the result, in reverse order. The inspector that handled the object is the first to receive a *process\_result* call with the object it just returned.

This behavior is similar to the Django request/response middleware processing.

If this inspector has no post-processing to do, it should just return *result* (the default implementation).

**Parameters**

- **result** – the return value of the winning inspector, or `None` if no inspector handled the object
- **method\_name** (*str*) – name of the method that was called on the inspector
- **obj** – first argument passed to inspector method
- **kwargs** – additional arguments passed to inspector method

#### Returns

**class** `drf_yasg.inspectors.FilterInspector` (*view, path, method, components, request*)

Bases: `drf_yasg.inspectors.BaseInspector`

Base inspector for filter backends.

Responsible for determining extra query parameters added by given filter backends.

#### Parameters

- **view** (`rest_framework.views.APIView`) – the view associated with this endpoint
- **path** (*str*) – the path component of the operation URL
- **method** (*str*) – the http method of the operation
- **components** (`openapi.ReferenceResolver`) – referenceable components
- **request** (`rest_framework.request.Request`) – the request made against the schema view; can be `None`

**get\_filter\_parameters** (*filter\_backend*)

Get the filter parameters for a single filter backend **instance**.

Should return *NotHandled* if this inspector does not know how to handle the given *filter\_backend*.

**Parameters** *filter\_backend* (`BaseFilterBackend`) – the filter backend

**Return type** `list[openapi.Parameter]`

**class** `drf_yasg.inspectors.PaginatorInspector` (*view, path, method, components, request*)

Bases: `drf_yasg.inspectors.BaseInspector`

Base inspector for paginators.

Responsible for determining extra query parameters and response structure added by given paginators.

#### Parameters

- **view** (`rest_framework.views.APIView`) – the view associated with this endpoint
- **path** (*str*) – the path component of the operation URL
- **method** (*str*) – the http method of the operation
- **components** (`openapi.ReferenceResolver`) – referenceable components
- **request** (`rest_framework.request.Request`) – the request made against the schema view; can be `None`

**get\_paginated\_response** (*paginator, response\_schema*)

Add appropriate paging fields to a response *Schema*.

Should return *NotHandled* if this inspector does not know how to handle the given *paginator*.

#### Parameters

- **paginator** (`BasePagination`) – the paginator

- **response\_schema** (`openapi.Schema`) – the response schema that must be paged.

**Return type** `openapi.Schema`

**get\_paginator\_parameters** (*paginator*)

Get the pagination parameters for a single paginator **instance**.

Should return `NotHandled` if this inspector does not know how to handle the given *paginator*.

**Parameters** **paginator** (`BasePagination`) – the paginator

**Return type** `list[openapi.Parameter]`

**class** `drf_yasg.inspectors.FieldInspector` (*view*, *path*, *method*, *components*, *request*, *field\_inspectors*)

Bases: `drf_yasg.inspectors.BaseInspector`

Base inspector for serializers and serializer fields.

**\_get\_partial\_types** (*field*, *swagger\_object\_type*, *use\_references*, *\*\*kwargs*)

Helper method to extract generic information from a field and return a partial constructor for the appropriate openapi object.

All arguments are the same as `field_to_swagger_object()`.

The return value is a tuple consisting of:

- a function for constructing objects of *swagger\_object\_type*; its prototype is:

```
def SwaggerType(existing_object=None, **instance_kwargs):
```

This function creates an instance of *swagger\_object\_type*, passing the following attributes to its init, in order of precedence:

- arguments specified by the *kwargs* parameter of `_get_partial_types()`
- *instance\_kwargs* passed to the constructor function
- title, description, required, x-nullable and default inferred from the field, where appropriate

If *existing\_object* is not `None`, it is updated instead of creating a new object.

- a type that should be used for child objects if *field* is of an array type. This can currently have two values:
  - `Schema` if *swagger\_object\_type* is `Schema`
  - `Items` if *swagger\_object\_type* is `Parameter` or `Items`

**Return type** (function, type[`openapi.Schema`] or type[`openapi.Items`])

**add\_manual\_fields** (*serializer\_or\_field*, *schema*)

Set fields from the `swagger_schema_fields` attribute on the Meta class. This method is called only for serializers or fields that are converted into `openapi.Schema` objects.

**Parameters**

- **serializer\_or\_field** – serializer or field instance
- **schema** (`openapi.Schema`) – the schema object to be modified in-place



**field\_to\_swagger\_object** (*field*, *swagger\_object\_type*, *use\_references*, *\*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type[openapi.SwaggerDict]*) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**probe\_field\_inspectors** (*field*, *swagger\_object\_type*, *use\_references*, *\*\*kwargs*)

Helper method for recursively probing *field\_inspectors* to handle a given field.

All arguments are the same as *field\_to\_swagger\_object()*.

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**class** *drf\_yasg.inspectors.SerializerInspector* (*view*, *path*, *method*, *components*, *request*, *field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

**get\_request\_parameters** (*serializer*, *in\_*)

Convert a DRF serializer into a list of *Parameters*.

Should return *NotHandled* if this inspector does not know how to handle the given *serializer*.

#### Parameters

- **serializer** (*serializers.BaseSerializer*) – the Serializer instance
- **in** (*str*) – the location of the parameters, one of the *openapi.IN\_\** constants

**Return type** list[*openapi.Parameter*]

**get\_schema** (*serializer*)

Convert a DRF Serializer instance to an *openapi.Schema*.

Should return *NotHandled* if this inspector does not know how to handle the given *serializer*.

**Parameters** **serializer** (*serializers.BaseSerializer*) – the Serializer instance

**Return type** *openapi.Schema*

**class** *drf\_yasg.inspectors.ViewInspector* (*view*, *path*, *method*, *components*, *request*, *overrides*)

Bases: *drf\_yasg.inspectors.BaseInspector*

Inspector class responsible for providing *Operation* definitions given a view, path and method.

**Parameters** **overrides** (*dict*) – manual overrides as passed to *@swagger\_auto\_schema*  
**prepend\_inspector\_overrides** (*inspectors*)

```
body_methods = ('PUT', 'PATCH', 'POST', 'DELETE')
```

```
field_inspectors = [<class 'drf_yasg.inspectors.field.CamelCaseJSONFilter'>, <class 'd
```

```
filter_inspectors = [<class 'drf_yasg.inspectors.query.DrfAPICompatInspector'>, <class
```

```
get_filter_parameters()
```

Return the parameters added to the view by its filter backends.

**Return type** `list[openapi.Parameter]`

```
get_operation(operation_keys)
```

Get an [Operation](#) for the given API endpoint (path, method). This includes query, body parameters and response schemas.

**Parameters** `operation_keys` (`tuple[str]`) – an array of keys describing the hierarchical layout of this view in the API; e.g. `('snippets', 'list')`, `('snippets', 'retrieve')`, etc.

**Return type** `openapi.Operation`

```
get_paginated_response(response_schema)
```

Add appropriate paging fields to a response [Schema](#).

**Parameters** `response_schema` (`openapi.Schema`) – the response schema that must be paged.

**Returns** the paginated response class: `Schema`, or `None` in case of an unknown pagination scheme

**Return type** `openapi.Schema`

```
get_pagination_parameters()
```

Return the parameters added to the view by its paginator.

**Return type** `list[openapi.Parameter]`

```
has_list_response()
```

Determine whether this view returns multiple objects. By default this is any non-detail view (see [is\\_list\\_view\(\)](#)) whose request method is one of [implicit\\_list\\_response\\_methods](#).

**Return type** `bool`

```
implicit_body_methods = ('PUT', 'PATCH', 'POST')
```

```
implicit_list_response_methods = ('GET',)
```

```
is_list_view()
```

Determine whether this view is a list or a detail view. The difference between the two is that detail views depend on a pk/id path parameter. Note that a non-detail view does not necessarily imply a list response ([has\\_list\\_response\(\)](#)), nor are list responses limited to non-detail views.

For example, one might have a `/topic/<pk>/posts` endpoint which is a detail view that has a list response.

**Return type** `bool`

```
paginator_inspectors = [<class 'drf_yasg.inspectors.query.DjangoRestResponsePagination
```

```
serializer_to_parameters(serializer, in_)
```

Convert a serializer to a possibly empty list of [Parameters](#).

**Parameters**

- **serializer** (`serializers.BaseSerializer`) – the `Serializer` instance

- **in** (*str*) – the location of the parameters, one of the *openapi.IN\_\** constants

**Return type** list[*openapi.Parameter*]

**serializer\_to\_schema** (*serializer*)

Convert a serializer to an OpenAPI *Schema*.

**Parameters** **serializer** (*serializers.BaseSerializer*) – the Serializer instance

**Returns** the converted *Schema*, or None in case of an unknown serializer

**Return type** *openapi.Schema* or *openapi.SchemaRef*

**should\_filter** ()

Determine whether filter backend parameters should be included for this request.

**Return type** bool

**should\_page** ()

Determine whether paging parameters and structure should be added to this operation's request and response.

**Return type** bool

**class** drf\_yasg.inspectors.DrfAPICompatInspector (*view, path, method, components, request*)

Bases: *drf\_yasg.inspectors.PaginatorInspector*, *drf\_yasg.inspectors.FilterInspector*

**Parameters**

- **view** (*rest\_framework.views.APIView*) – the view associated with this endpoint
- **path** (*str*) – the path component of the operation URL
- **method** (*str*) – the http method of the operation
- **components** (*openapi.ReferenceResolver*) – referenceable components
- **request** (*rest\_framework.request.Request*) – the request made against the schema view; can be None

**get\_filter\_parameters** (*filter\_backend*)

Get the filter parameters for a single filter backend **instance**.

Should return *NotHandled* if this inspector does not know how to handle the given *filter\_backend*.

**Parameters** **filter\_backend** (*BaseFilterBackend*) – the filter backend

**Return type** list[*openapi.Parameter*]

**get\_paginator\_parameters** (*paginator*)

Get the pagination parameters for a single paginator **instance**.

Should return *NotHandled* if this inspector does not know how to handle the given *paginator*.

**Parameters** **paginator** (*BasePagination*) – the paginator

**Return type** list[*openapi.Parameter*]

**param\_to\_schema** (*param*)

**class** drf\_yasg.inspectors.CoreAPICompatInspector (*view, path, method, components, request*)

Bases: *drf\_yasg.inspectors.PaginatorInspector*, *drf\_yasg.inspectors.FilterInspector*

Converts `coreapi.Fields` to `openapi.Parameters` for filters and paginators that implement a `get_schema_fields` method.

**Parameters**

- **view** (`rest_framework.views.APIView`) – the view associated with this end-point
- **path** (`str`) – the path component of the operation URL
- **method** (`str`) – the http method of the operation
- **components** (`openapi.ReferenceResolver`) – referenceable components
- **request** (`rest_framework.request.Request`) – the request made against the schema view; can be `None`

**coreapi\_field\_to\_parameter** (`field`)

Convert an instance of `coreapi.Field` to a swagger `Parameter` object.

**Parameters** **field** (`coreapi.Field`) –

**Return type** `openapi.Parameter`

**get\_filter\_parameters** (`filter_backend`)

Get the filter parameters for a single filter backend **instance**.

Should return `NotHandled` if this inspector does not know how to handle the given `filter_backend`.

**Parameters** **filter\_backend** (`BaseFilterBackend`) – the filter backend

**Return type** `list[openapi.Parameter]`

**get\_paginator\_parameters** (`paginator`)

Get the pagination parameters for a single paginator **instance**.

Should return `NotHandled` if this inspector does not know how to handle the given `paginator`.

**Parameters** **paginator** (`BasePagination`) – the paginator

**Return type** `list[openapi.Parameter]`

**class** `drf_yasg.inspectors.DjangoRestResponsePagination` (`view`, `path`, `method`, `components`, `request`)

Bases: `drf_yasg.inspectors.PaginatorInspector`

Provides response schema pagination wrapping for django-rest-framework's `LimitOffsetPagination`, `PageNumberPagination` and `CursorPagination`

**Parameters**

- **view** (`rest_framework.views.APIView`) – the view associated with this end-point
- **path** (`str`) – the path component of the operation URL
- **method** (`str`) – the http method of the operation
- **components** (`openapi.ReferenceResolver`) – referenceable components
- **request** (`rest_framework.request.Request`) – the request made against the schema view; can be `None`

**fix\_paginated\_property** (`key: str`, `value: dict`)

**get\_paginated\_response** (`paginator`, `response_schema`)

Add appropriate paging fields to a response `Schema`.

Should return `NotHandled` if this inspector does not know how to handle the given `paginator`.

**Parameters**

- **paginator** (*BasePagination*) – the paginator
- **response\_schema** (*openapi.Schema*) – the response schema that must be paged.

**Return type** *openapi.Schema*

**class** `drf_yasg.inspectors.InlineSerializerInspector` (*view, path, method, components, request, field\_inspectors*)

Bases: *drf\_yasg.inspectors.SerializerInspector*

Provides serializer conversions using *FieldInspector.field\_to\_swagger\_object()*.

**\_\_has\_ref\_name** (*serializer*)

**add\_manual\_parameters** (*serializer, parameters*)

Add/replace parameters from the given list of automatically generated request parameters. This method is called only when the serializer is converted into a list of parameters for use in a form data request.

**Parameters**

- **serializer** – serializer instance
- **parameters** (*list[openapi.Parameter]*) – generated parameters

**Returns** modified parameters

**Return type** *list[openapi.Parameter]*

**field\_to\_swagger\_object** (*field, swagger\_object\_type, use\_references, \*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

**Parameters**

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type[openapi.SwaggerDict]*) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**get\_parameter\_name** (*field\_name*)

**get\_property\_name** (*field\_name*)

**get\_request\_parameters** (*serializer, in\_*)

Convert a DRF serializer into a list of *Parameters*.

Should return *NotHandled* if this inspector does not know how to handle the given *serializer*.

**Parameters**

- **serializer** (*serializers.BaseSerializer*) – the Serializer instance
- **in** (*str*) – the location of the parameters, one of the *openapi.IN\_\** constants

**Return type** `list[openapi.Parameter]`

**get\_schema** (*serializer*)

Convert a DRF Serializer instance to an *openapi.Schema*.

Should return *NotHandled* if this inspector does not know how to handle the given *serializer*.

**Parameters** **serializer** (*serializers.BaseSerializer*) – the Serializer instance

**Return type** *openapi.Schema*

**get\_serializer\_ref\_name** (*serializer*)

**use\_definitions** = **False**

**class** *drf\_yasg.inspectors.RecursiveFieldInspector* (*view, path, method, components, request, field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

Provides conversion for RecursiveField (<https://github.com/heywbj/django-rest-framework-recursive>)

**class** *drf\_yasg.inspectors.ReferencingSerializerInspector* (*view, path, method, components, request, field\_inspectors*)

Bases: *drf\_yasg.inspectors.InlineSerializerInspector*

**use\_definitions** = **True**

**class** *drf\_yasg.inspectors.RelatedFieldInspector* (*view, path, method, components, request, field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

Provides conversions for RelatedFields.

**field\_to\_swagger\_object** (*field, swagger\_object\_type, use\_references, \*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

**Parameters**

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type[openapi.SwaggerDict]*) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**class** *drf\_yasg.inspectors.SimpleFieldInspector* (*view, path, method, components, request, field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

Provides conversions for fields which can be described using just type, format, pattern and min/max validators.

**field\_to\_swagger\_object** (*field*, *swagger\_object\_type*, *use\_references*, *\*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type[openapi.SwaggerDict]*) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**class** *drf\_yasg.inspectors.FileFieldInspector* (*view*, *path*, *method*, *components*, *request*, *field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

Provides conversions for FileFields.

**field\_to\_swagger\_object** (*field*, *swagger\_object\_type*, *use\_references*, *\*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type[openapi.SwaggerDict]*) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**class** *drf\_yasg.inspectors.ChoiceFieldInspector* (*view*, *path*, *method*, *components*, *request*, *field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

Provides conversions for ChoiceField and MultipleChoiceField.

**field\_to\_swagger\_object** (*field*, *swagger\_object\_type*, *use\_references*, *\*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field

- **swagger\_object\_type** (*type*[*openapi.SwaggerDict*]) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**class** *drf\_yasg.inspectors.DictFieldInspector* (*view, path, method, components, request, field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

Provides conversion for DictField.

**field\_to\_swagger\_object** (*field, swagger\_object\_type, use\_references, \*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type*[*openapi.SwaggerDict*]) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**class** *drf\_yasg.inspectors.JSONFieldInspector* (*view, path, method, components, request, field\_inspectors*)

Bases: *drf\_yasg.inspectors.FieldInspector*

Provides conversion for JSONField.

**field\_to\_swagger\_object** (*field, swagger\_object\_type, use\_references, \*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type*[*openapi.SwaggerDict*]) – should be one of Schema, Parameter, Items
- **use\_references** (*bool*) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if *swagger\_object\_type* is Parameter, *name* and *in\_* should be provided



**Returns** the swagger object

**Return type** `openapi.Parameter` or `openapi.Items` or `openapi.Schema` or `openapi.SchemaRef`

```
class drf_yasg.inspectors.StringDefaultFieldInspector (view, path, method,
                                                    components, request,
                                                    field_inspectors)
```

Bases: `drf_yasg.inspectors.FieldInspector`

For otherwise unhandled fields, return them as plain `TYPE_STRING` objects.

**field\_to\_swagger\_object** (*field*, *swagger\_object\_type*, *use\_references*, *\*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return `NotHandled` if this inspector does not know how to handle the given *field*.

**Parameters**

- **field** (`rest_framework.serializers.Field`) – the source field
- **swagger\_object\_type** (`type[openapi.SwaggerDict]`) – should be one of Schema, Parameter, Items
- **use\_references** (`bool`) – if False, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if `swagger_object_type` is Parameter, `name` and `in_` should be provided

**Returns** the swagger object

**Return type** `openapi.Parameter` or `openapi.Items` or `openapi.Schema` or `openapi.SchemaRef`

```
class drf_yasg.inspectors.CamelCaseJSONFilter (view, path, method, components, request,
                                              field_inspectors)
```

Bases: `drf_yasg.inspectors.FieldInspector`

Converts property names to camelCase if `django_rest_framework_camel_case` is used.

**camelize\_schema** (*schema*)

Recursively camelize property names for the given schema using `django_rest_framework_camel_case`. The target schema object must be modified in-place.

**Parameters** **schema** (`openapi.Schema`) – the *Schema* object

**camelize\_string** (*s*)

Hack to force `django_rest_framework_camel_case` to camelize a plain string.

**Parameters** **s** (*str*) – the string

**Returns** camelized string

**Return type** `str`

**is\_camel\_case** ()

**process\_result** (*result*, *method\_name*, *obj*, *\*\*kwargs*)

After an inspector handles an object (i.e. returns a value other than `NotHandled`), all inspectors that were probed get the chance to alter the result, in reverse order. The inspector that handled the object is the first to receive a `process_result` call with the object it just returned.

This behavior is similar to the Django request/response middleware processing.

If this inspector has no post-processing to do, it should just return `result` (the default implementation).

#### Parameters

- **result** – the return value of the winning inspector, or `None` if no inspector handled the object
- **method\_name** (*str*) – name of the method that was called on the inspector
- **obj** – first argument passed to inspector method
- **kwargs** – additional arguments passed to inspector method

#### Returns

**class** `drf_yasg.inspectors.HiddenFieldInspector` (*view, path, method, components, request, field\_inspectors*)

Bases: `drf_yasg.inspectors.FieldInspector`

Hide `HiddenField`.

**field\_to\_swagger\_object** (*field, swagger\_object\_type, use\_references, \*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type[openapi.SwaggerDict]*) – should be one of `Schema`, `Parameter`, `Items`
- **use\_references** (*bool*) – if `False`, forces all objects to be declared inline instead of by referencing other components
- **kwargs** – extra attributes for constructing the object; if `swagger_object_type` is `Parameter`, `name` and `in_` should be provided

**Returns** the swagger object

**Return type** *openapi.Parameter* or *openapi.Items* or *openapi.Schema* or *openapi.SchemaRef*

**class** `drf_yasg.inspectors.SerializerMethodFieldInspector` (*view, path, method, components, request, field\_inspectors*)

Bases: `drf_yasg.inspectors.FieldInspector`

Provides conversion for `SerializerMethodField`, optionally using information from the `swagger_serializer_method` decorator.

**field\_to\_swagger\_object** (*field, swagger\_object\_type, use\_references, \*\*kwargs*)

Convert a drf Serializer or Field instance into a Swagger object.

Should return *NotHandled* if this inspector does not know how to handle the given *field*.

#### Parameters

- **field** (*rest\_framework.serializers.Field*) – the source field
- **swagger\_object\_type** (*type[openapi.SwaggerDict]*) – should be one of `Schema`, `Parameter`, `Items`
- **use\_references** (*bool*) – if `False`, forces all objects to be declared inline instead of by referencing other components

- **kwargs** – extra attributes for constructing the object; if `swagger_object_type` is `Parameter`, `name` and `in_` should be provided

**Returns** the swagger object

**Return type** `openapi.Parameter` or `openapi.Items` or `openapi.Schema` or `openapi.SchemaRef`

**class** `drf_yasg.inspectors.SwaggerAutoSchema` (`view`, `path`, `method`, `components`, `request`, `overrides`, `operation_keys=None`)

Bases: `drf_yasg.inspectors.ViewInspector`

**\_\_get\_request\_body\_override** ()

Parse the `request_body` key in the override dict. This method is not public API.

**add\_manual\_parameters** (`parameters`)

Add/replace parameters from the given list of automatically generated request parameters.

**Parameters** `parameters` (`list[openapi.Parameter]`) – generated parameters

**Returns** modified parameters

**Return type** `list[openapi.Parameter]`

**get\_consumes** ()

Return the MIME types this endpoint can consume.

**Return type** `list[str]`

**get\_default\_response\_serializer** ()

Return the default response serializer for this endpoint. This is derived from either the `request_body` override or the request serializer (`get_view_serializer()`).

**Returns** response serializer, `Schema`, `SchemaRef`, `None`

**get\_default\_responses** ()

Get the default responses determined for this view from the request serializer and request method.

**Type** `dict[str, openapi.Schema]`

**get\_operation** (`operation_keys=None`)

Get an `Operation` for the given API endpoint (path, method). This includes query, body parameters and response schemas.

**Parameters** `operation_keys` (`tuple[str]`) – an array of keys describing the hierarchical layout of this view in the API; e.g. `('snippets', 'list')`, `('snippets', 'retrieve')`, etc.

**Return type** `openapi.Operation`

**get\_operation\_id** (`operation_keys=None`)

Return an unique ID for this operation. The ID must be unique across all `Operation` objects in the API.

**Parameters** `operation_keys` (`tuple[str]`) – an array of keys derived from the path describing the hierarchical layout of this view in the API; e.g. `('snippets', 'list')`, `('snippets', 'retrieve')`, etc.

**Return type** `str`

**get\_produces** ()

Return the MIME types this endpoint can produce.

**Return type** `list[str]`

**get\_query\_parameters** ()

Return the query parameters accepted by this view.

**Return type** `list[openapi.Parameter]`

**get\_query\_serializer()**

Return the query serializer (used for parsing query parameters) for this endpoint.

**Returns** the query serializer, or None

**get\_request\_body\_parameters** (*consumes*)

Return the request body parameters for this view. This is either:

- a list with a single object `Parameter` with a `Schema` derived from the request serializer
- a list of primitive `Parameters` parsed as form data

**Parameters** **consumes** (*list[str]*) – a list of accepted MIME types as returned by `get_consumes()`

**Returns** a (potentially empty) list of `Parameters` either `in: body` or `in: formData`

**Return type** `list[openapi.Parameter]`

**get\_request\_body\_schema** (*serializer*)

Return the `Schema` for a given request's body data. Only applies to PUT, PATCH and POST requests.

**Parameters** **serializer** – the view's request serializer as returned by `get_request_serializer()`

**Return type** `openapi.Schema`

**get\_request\_form\_parameters** (*serializer*)

Given a `Serializer`, return a list of `in: formData Parameters`.

**Parameters** **serializer** – the view's request serializer as returned by `get_request_serializer()`

**Return type** `list[openapi.Parameter]`

**get\_request\_serializer()**

Return the request serializer (used for parsing the request payload) for this endpoint.

**Returns** the request serializer, or one of `Schema`, `SchemaRef`, None

**Return type** `rest_framework.serializers.Serializer`

**get\_response\_schemas** (*response\_serializers*)

Return the `openapi.Response` objects calculated for this view.

**Parameters** **response\_serializers** (*dict*) – response serializers as returned by `get_response_serializers()`

**Returns** a dictionary of status code to `Response` object

**Return type** `dict[str, openapi.Response]`

**get\_response\_serializers()**

Return the response codes that this view is expected to return, and the serializer for each response body. The return value should be a dict where the keys are possible status codes, and values are either strings, `Serializers`, `Schema`, `SchemaRef` or `Response` objects. See `@swagger_auto_schema` for more details.

**Returns** the response serializers

**Return type** `dict`

**get\_responses()**

Get the possible responses for this view as a swagger *Responses* object.

**Returns** the documented responses

**Return type** *openapi.Responses*

**get\_security()**

Return a list of security requirements for this operation.

Returning an empty list marks the endpoint as unauthenticated (i.e. removes all accepted authentication schemes). Returning *None* will inherit the top-level security requirements.

**Returns** security requirements

**Return type** *list[dict[str,list[str]]]*

**get\_summary\_and\_description()**

Return an operation summary and description determined from the view's docstring.

**Returns** summary and description

**Return type** (str,str)

**get\_tags(operation\_keys=None)**

Get a list of tags for this operation. Tags determine how operations relate with each other, and in the UI each tag will show as a group containing the operations that use it. If not provided in overrides, tags will be inferred from the operation url.

**Parameters** *operation\_keys* (*tuple[str]*) – an array of keys derived from the path describing the hierarchical layout of this view in the API; e.g. ('snippets', 'list'), ('snippets', 'retrieve'), etc.

**Return type** *list[str]*

**get\_view\_serializer()**

Return the serializer as defined by the view's *get\_serializer()* method.

**Returns** the view's *Serializer*

**Return type** *rest\_framework.serializers.Serializer*

**is\_deprecated()**

Return *True* if this operation is to be marked as deprecated.

**Returns** deprecation status

**Return type** *bool*

**make\_body\_parameter(schema)**

Given a *Schema* object, create an in: *body Parameter*.

**Parameters** *schema* (*openapi.Schema*) – the request body schema

**Return type** *openapi.Parameter*

**split\_summary\_from\_description(description)**

Decide if and how to split a summary out of the given description. The default implementation uses the first paragraph of the description as a summary if it is less than 120 characters long.

**Parameters** *description* – the full description to be analyzed

**Returns** summary and description

**Return type** (str,str)

### 11.1.5 drf\_yasg.middleware

```
class drf_yasg.middleware.SwaggerExceptionMiddleware(get_response)
    Bases: object

    process_exception(request, exception)
```

### 11.1.6 drf\_yasg.openapi

```
drf_yasg.openapi.TYPE_OBJECT = 'object'
drf_yasg.openapi.TYPE_STRING = 'string'
drf_yasg.openapi.TYPE_NUMBER = 'number'
drf_yasg.openapi.TYPE_INTEGER = 'integer'
drf_yasg.openapi.TYPE_BOOLEAN = 'boolean'
drf_yasg.openapi.TYPE_ARRAY = 'array'
drf_yasg.openapi.TYPE_FILE = 'file'
drf_yasg.openapi.FORMAT_DATE = 'date'
drf_yasg.openapi.FORMAT_DATETIME = 'date-time'
drf_yasg.openapi.FORMAT_PASSWORD = 'password'
drf_yasg.openapi.FORMAT_BINARY = 'binary'
drf_yasg.openapi.FORMAT_BASE64 = 'bytes'
drf_yasg.openapi.FORMAT_FLOAT = 'float'
drf_yasg.openapi.FORMAT_DOUBLE = 'double'
drf_yasg.openapi.FORMAT_INT32 = 'int32'
drf_yasg.openapi.FORMAT_INT64 = 'int64'
drf_yasg.openapi.FORMAT_EMAIL = 'email'
drf_yasg.openapi.FORMAT_IPV4 = 'ipv4'
drf_yasg.openapi.FORMAT_IPV6 = 'ipv6'
drf_yasg.openapi.FORMAT_URI = 'uri'
drf_yasg.openapi.FORMAT_UUID = 'uuid'
drf_yasg.openapi.FORMAT_SLUG = 'slug'
drf_yasg.openapi.IN_BODY = 'body'
drf_yasg.openapi.IN_PATH = 'path'
drf_yasg.openapi.IN_QUERY = 'query'
drf_yasg.openapi.IN_FORM = 'formData'
drf_yasg.openapi.IN_HEADER = 'header'
drf_yasg.openapi.SCHEMA_DEFINITIONS = 'definitions'
drf_yasg.openapi.make_swagger_name(attribute_name)
    Convert a python variable name into a Swagger spec attribute name.
```

In particular,

- if name starts with `x_`, return `x-{camelCase}`
- if name is `ref`, return `$ref`
- else return the name converted to camelCase, with trailing underscores stripped

**Parameters** `attribute_name` (*str*) – python attribute name

**Returns** swagger name

```
class drf_yasg.openapi.SwaggerDict (**attrs)
```

Bases: `collections.OrderedDict`

A particular type of `OrderedDict`, which maps all attribute accesses to dict lookups using `make_swagger_name()`. Attribute names starting with `_` are set on the object as-is and are not included in the specification output.

Used as a base class for all Swagger helper models.

```
__insert_extras__ ()
```

From an ordering perspective, it is desired that extra attributes such as vendor extensions stay at the bottom of the object. However, python2.7's `OrderedDict` craps out if you try to insert into it before calling `init`. This means that subclasses must call `super().__init__` as the first statement of their own `__init__`, which would result in the extra attributes being added first. For this reason, we defer the insertion of the attributes and require that subclasses call `._insert_extras__` at the end of their `__init__` method.

```
static _as_odict (obj, memo)
```

Implementation detail of `as_odict()`

```
as_odict ()
```

Convert this object into an `OrderedDict` instance.

**Return type** `OrderedDict`

```
class drf_yasg.openapi.Contact (name=None, url=None, email=None, **extra)
```

Bases: `drf_yasg.openapi.SwaggerDict`

Swagger Contact object

At least one of the following fields is required:

**Parameters**

- **name** (*str*) – contact name
- **url** (*str*) – contact url
- **email** (*str*) – contact e-mail

```
class drf_yasg.openapi.License (name, url=None, **extra)
```

Bases: `drf_yasg.openapi.SwaggerDict`

Swagger License object

**Parameters**

- **name** (*str*) – Required. License name
- **url** (*str*) – link to detailed license information

```
class drf_yasg.openapi.Info (title, default_version, description=None, terms_of_service=None,  
                             contact=None, license=None, **extra)
```

Bases: `drf_yasg.openapi.SwaggerDict`

Swagger Info object

**Parameters**

- **title** (*str*) – Required. API title.
- **default\_version** (*str*) – Required. API version string (not to be confused with Swagger spec version)
- **description** (*str*) – API description; markdown supported
- **terms\_of\_service** (*str*) – API terms of service; should be a URL
- **contact** (*Contact*) – contact object
- **license** (*License*) – license object

**class** drf\_yasg.openapi.**Swagger** (*info=None, \_url=None, \_prefix=None, \_version=None, consumes=None, produces=None, security\_definitions=None, security=None, paths=None, definitions=None, \*\*extra*)

Bases: *drf\_yasg.openapi.SwaggerDict*

Root Swagger object.

#### Parameters

- **info** (*Info*) – info object
- **\_url** (*str*) – URL used for setting the API host and scheme
- **\_prefix** (*str*) – api path prefix to use in setting basePath; this will be appended to the wsgi SCRIPT\_NAME prefix or Django's FORCE\_SCRIPT\_NAME if applicable
- **\_version** (*str*) – version string to override Info
- **security\_definitions** (*dict[str, dict]*) – list of supported authentication mechanisms
- **security** (*list[dict[str, list[str]]]*) – authentication mechanisms accepted globally
- **consumes** (*list[str]*) – consumed MIME types; can be overridden in Operation
- **produces** (*list[str]*) – produced MIME types; can be overridden in Operation
- **paths** (*Paths*) – paths object
- **definitions** (*dict[str, Schema]*) – named models

**classmethod** **get\_base\_path** (*script\_prefix, api\_prefix*)

Determine an appropriate value for basePath based on the SCRIPT\_NAME and the api common prefix.

#### Parameters

- **script\_prefix** (*str*) – script prefix as defined by django get\_script\_prefix
- **api\_prefix** (*str*) – api common prefix

**Returns** joined base path

**class** drf\_yasg.openapi.**Paths** (*paths, \*\*extra*)

Bases: *drf\_yasg.openapi.SwaggerDict*

A listing of all the paths in the API.

**Parameters** **paths** (*dict[str, PathItem]*) –

**class** drf\_yasg.openapi.**PathItem** (*get=None, put=None, post=None, delete=None, options=None, head=None, patch=None, parameters=None, \*\*extra*)

Bases: *drf\_yasg.openapi.SwaggerDict*

Information about a single path



**Parameters**

- **get** (*Operation*) – operation for GET
- **put** (*Operation*) – operation for PUT
- **post** (*Operation*) – operation for POST
- **delete** (*Operation*) – operation for DELETE
- **options** (*Operation*) – operation for OPTIONS
- **head** (*Operation*) – operation for HEAD
- **patch** (*Operation*) – operation for PATCH
- **parameters** (*list* [*Parameter*]) – parameters that apply to all operations

**OPERATION\_NAMES** = ['get', 'put', 'post', 'delete', 'options', 'head', 'patch']

**operations**

A list of all standard Operations on this PathItem object. See *OPERATION\_NAMES*.

**Returns** list of (method name, Operation) tuples

**Return type** list[tuple[str,*Operation*]]

```
class drf_yasg.openapi.Operation (operation_id, responses, parameters=None, consumes=None,
                                produces=None, summary=None, description=None,
                                tags=None, security=None, **extra)
```

Bases: *drf\_yasg.openapi.SwaggerDict*

Information about an API operation (path + http method combination)

**Parameters**

- **operation\_id** (*str*) – operation ID, should be unique across all operations
- **responses** (*Responses*) – responses returned
- **parameters** (*list* [*Parameter*]) – parameters accepted
- **consumes** (*list* [*str*]) – content types accepted
- **produces** (*list* [*str*]) – content types produced
- **summary** (*str*) – operation summary; should be < 120 characters
- **description** (*str*) – operation description; can be of any length and supports mark-down
- **tags** (*list* [*str*]) – operation tags
- **security** (*list* [*dict* [*str*, *list* [*str*]]]) – list of security requirements

```
drf_yasg.openapi._check_type (type, format, enum, pattern, items, _obj_type)
```

```
class drf_yasg.openapi.Items (type=None, format=None, enum=None, pattern=None,
                             items=None, **extra)
```

Bases: *drf\_yasg.openapi.SwaggerDict*

Used when defining an array *Parameter* to describe the array elements.

**Parameters**

- **type** (*str*) – type of the array elements; must not be object
- **format** (*str*) – value format, see OpenAPI spec
- **enum** (*list*) – restrict possible values
- **pattern** (*str*) – pattern if type is string

- **items** (*Items*) – only valid if *type* is array

```
class drf_yasg.openapi.Parameter(name, in_, description=None, required=None,
                                schema=None, type=None, format=None, enum=None,
                                pattern=None, items=None, default=None, **extra)
```

Bases: *drf\_yasg.openapi.SwaggerDict*

Describe parameters accepted by an *Operation*. Each parameter should be a unique combination of (*name*, *in\_*). body and form parameters in the same operation are mutually exclusive.

#### Parameters

- **name** (*str*) – parameter name
- **in** (*str*) – parameter location
- **description** (*str*) – parameter description
- **required** (*bool*) – whether the parameter is required for the operation
- **schema** (*Schema* or *SchemaRef*) – required if *in\_* is body
- **type** (*str*) – parameter type; required if *in\_* is not body; must not be object
- **format** (*str*) – value format, see OpenAPI spec
- **enum** (*list*) – restrict possible values
- **pattern** (*str*) – pattern if type is *string*
- **items** (*Items*) – only valid if *type* is array
- **default** – default value if the parameter is not provided; must conform to parameter type

```
class drf_yasg.openapi.Schema(title=None, description=None, type=None, format=None,
                              enum=None, pattern=None, properties=None, additional_properties=None,
                              required=None, items=None, default=None, read_only=None, **extra)
```

Bases: *drf\_yasg.openapi.SwaggerDict*

Describes a complex object accepted as parameter or returned as a response.

#### Parameters

- **title** (*str*) – schema title
- **description** (*str*) – schema description
- **type** (*str*) – value type; required
- **format** (*str*) – value format, see OpenAPI spec
- **enum** (*list*) – restrict possible values
- **pattern** (*str*) – pattern if type is *string*
- **properties** (*dict*[*str*, *Schema* or *SchemaRef*]) – object properties; required if *type* is object
- **additional\_properties** (*bool* or *Schema* or *SchemaRef*) – allow wildcard properties not listed in *properties*
- **required** (*list*[*str*]) – list of required property names
- **items** (*Schema* or *SchemaRef*) – type of array items, only valid if *type* is array
- **default** – only valid when insider another *Schema*'s *properties*; the default value of this property if it is not provided, must conform to the type of this *Schema*

- **read\_only** – only valid when insider another Schema's properties; declares the property as read only - it must only be sent as part of responses, never in requests

```
OR_REF = (<class 'drf_yasg.openapi.Schema'>, <class 'drf_yasg.openapi.SchemaRef'>)
```

useful for type-checking, e.g `isinstance(obj, openapi.Schema.OR_REF)`

```
_remove_read_only()
```

```
class drf_yasg.openapi._Ref(resolver, name, scope, expected_type, ignore_unresolved=False)
```

Bases: `drf_yasg.openapi.SwaggerDict`

Base class for all reference types. A reference object has only one property, `$ref`, which must be a JSON reference to a valid object in the specification, e.g. `#/definitions/Article` to refer to an article model.

#### Parameters

- **resolver** (`ReferenceResolver`) – component resolver which must contain the referenced object
- **name** (`str`) – referenced object name, e.g. “Article”
- **scope** (`str`) – reference scope, e.g. “definitions”
- **expected\_type** (`type[SwaggerDict]`) – the expected type that will be asserted on the object found in resolver
- **ignore\_unresolved** (`bool`) – do not throw if the referenced object does not exist

```
ref_name_re = re.compile('#/(?P<scope>.+)/(?P<name>[^\/]*)$')
```

```
resolve(resolver)
```

Get the object targeted by this reference from the given component resolver.

**Parameters** **resolver** (`ReferenceResolver`) – component resolver which must contain the referenced object

**Returns** the target object

```
class drf_yasg.openapi.SchemaRef(resolver, schema_name, ignore_unresolved=False)
```

Bases: `drf_yasg.openapi._Ref`

Adds a reference to a named Schema defined in the `#/definitions/` object.

#### Parameters

- **resolver** (`ReferenceResolver`) – component resolver which must contain the definition
- **schema\_name** (`str`) – schema name
- **ignore\_unresolved** (`bool`) – do not throw if the referenced object does not exist

```
drf_yasg.openapi.resolve_ref(ref_or_obj, resolver)
```

Resolve `ref_or_obj` if it is a reference type. Return it unchanged if not.

#### Parameters

- **ref\_or\_obj** (`SwaggerDict` or `_Ref`) – object to dereference
- **resolver** – component resolver which must contain the referenced object

```
class drf_yasg.openapi.Responses(responses, default=None, **extra)
```

Bases: `drf_yasg.openapi.SwaggerDict`

Describes the expected responses of an `Operation`.

#### Parameters

- **responses** (`dict[str or int, Response]`) – mapping of status code to response definition

- **default** ([Response](#)) – description of the response structure to expect if another status code is returned

**class** `drf_yasg.openapi.Response` (*description, schema=None, examples=None, \*\*extra*)

Bases: [drf\\_yasg.openapi.SwaggerDict](#)

Describes the structure of an operation's response.

**Parameters**

- **description** (*str*) – response description
- **schema** ([Schema](#) or [SchemaRef](#) or `rest_framework.serializers.Serializer` or `type[rest_framework.serializers.Serializer]`) – structure of the response body
- **examples** (*dict*) – example bodies mapped by mime type

**class** `drf_yasg.openapi.ReferenceResolver` (*\*scopes, \*\*kwargs*)

Bases: `object`

A mapping type intended for storing objects pointed at by Swagger Refs. Provides support and checks for different reference scopes, e.g. 'definitions'.

For example:

```
> components = ReferenceResolver('definitions', 'parameters')
> definitions = components.with_scope('definitions')
> definitions.set('Article', Schema(...))
> print(components)
{'definitions': OrderedDict([('Article', Schema(...))], 'parameters':
↳OrderedDict())}
```

**Parameters** **scopes** (*str*) – an enumeration of the valid scopes this resolver will contain

**with\_scope** (*scope*)

Return a view into this [ReferenceResolver](#) whose scope is defaulted and forced to *scope*.

**Parameters** **scope** (*str*) – target scope, must be in this resolver's *scopes*

**Returns** the bound resolver

**Return type** [ReferenceResolver](#)

**\_check\_scope** (*scope*)

**set** (*name, obj, scope=None*)

Set an object in the given scope, raise an error if it already exists.

**Parameters**

- **name** (*str*) – reference name
- **obj** – referenced object
- **scope** (*str*) – reference scope

**setdefault** (*name, maker, scope=None*)

Set an object in the given scope only if it does not exist.

**Parameters**

- **name** (*str*) – reference name
- **maker** (*function*) – object factory, called only if necessary
- **scope** (*str*) – reference scope

**get** (*name*, *scope=None*)

Get an object from the given scope, raise an error if it does not exist.

**Parameters**

- **name** (*str*) – reference name
- **scope** (*str*) – reference scope

**Returns** the object

**getdefault** (*name*, *default=None*, *scope=None*)

Get an object from the given scope or a default value if it does not exist.

**Parameters**

- **name** (*str*) – reference name
- **default** – the default value
- **scope** (*str*) – reference scope

**Returns** the object or *default*

**has** (*name*, *scope=None*)

Check if an object exists in the given scope.

**Parameters**

- **name** (*str*) – reference name
- **scope** (*str*) – reference scope

**Returns** True if the object exists

**Return type** bool

**scopes**

**keys** ()

### 11.1.7 drf\_yasg.renderers

**class** drf\_yasg.renderers.\_SpecRenderer

Bases: rest\_framework.renderers.BaseRenderer

Base class for text renderers. Handles encoding and validation.

**charset** = 'utf-8'

**validators** = []

**codec\_class** = None

**classmethod** with\_validators (*validators*)

**render** (*data*, *media\_type=None*, *renderer\_context=None*)

**class** drf\_yasg.renderers.OpenAPIRenderer

Bases: drf\_yasg.renderers.\_SpecRenderer

Renders the schema as a JSON document with the application/openapi+json specific mime type.

**media\_type** = 'application/openapi+json'

**format** = 'openapi'

```
    codec_class
        alias of drf_yasg.codecs.OpenAPICodecJson

class drf_yasg.renderers.SwaggerJSONRenderer
    Bases: drf_yasg.renderers._SpecRenderer

    Renders the schema as a JSON document with the generic application/json mime type.

    media_type = 'application/json'

    format = '.json'

    codec_class
        alias of drf_yasg.codecs.OpenAPICodecJson

class drf_yasg.renderers.SwaggerYAMLRenderer
    Bases: drf_yasg.renderers._SpecRenderer

    Renders the schema as a YAML document.

    media_type = 'application/yaml'

    format = '.yaml'

    codec_class
        alias of drf_yasg.codecs.OpenAPICodecYaml

class drf_yasg.renderers._UIRenderer
    Bases: rest_framework.renderers.BaseRenderer

    Base class for web UI renderers. Handles loading and passing settings to the appropriate template.

    media_type = 'text/html'

    charset = 'utf-8'

    template = ''

    render(swagger, accepted_media_type=None, renderer_context=None)

    set_context(renderer_context, swagger=None)

    resolve_url(to)

    get_auth_urls()

    get_oauth2_config()

class drf_yasg.renderers.SwaggerUIRenderer
    Bases: drf_yasg.renderers._UIRenderer

    Renders a swagger-ui web interface for schema browsing.

    template = 'drf-yasg/swagger-ui.html'

    format = 'swagger'

    set_context(renderer_context, swagger=None)

    get_swagger_ui_settings()

class drf_yasg.renderers.ReDocRenderer
    Bases: drf_yasg.renderers._UIRenderer

    Renders a ReDoc web interface for schema browsing.

    template = 'drf-yasg/redoc.html'

    format = 'redoc'
```

```
set_context (renderer_context, swagger=None)

get_redoc_settings ()

class drf_yasg.renderers.ReDocOldRenderer
    Bases: drf_yasg.renderers.ReDocRenderer

    Renders a ReDoc 1.x.x web interface for schema browsing.

    template = 'drf-yasg/redoc-old.html'
```

### 11.1.8 drf\_yasg.utils

```
class drf_yasg.utils.no_body
    Bases: object
```

Used as a sentinel value to forcibly remove the body of a request via `swagger_auto_schema()`.

```
class drf_yasg.utils.unset
    Bases: object
```

Used as a sentinel value for function parameters not set by the caller where `None` would be a valid value.

```
drf_yasg.utils.swagger_auto_schema (method=None, methods=None, auto_schema=<class
                                     'drf_yasg.utils.unset'>, request_body=None,
                                     query_serializer=None, manual_parameters=None,
                                     operation_id=None, operation_description=None,
                                     operation_summary=None, security=None, depre-
                                     cated=None, responses=None, field_inspectors=None,
                                     filter_inspectors=None, paginator_inspectors=None,
                                     tags=None, **extra_overrides)
```

Decorate a view method to customize the `Operation` object generated from it.

`method` and `methods` are mutually exclusive and must only be present when decorating a view method that accepts more than one HTTP request method.

The `auto_schema` and `operation_description` arguments take precedence over view- or method-level values.

#### Parameters

- **method** (*str*) – for multi-method views, the http method the options should apply to
- **methods** (*list[str]*) – for multi-method views, the http methods the options should apply to
- **auto\_schema** (`drf_yasg.inspectors.SwaggerAutoSchema`) – custom class to use for generating the `Operation` object; this overrides both the class-level `swagger_schema` attribute and the `DEFAULT_AUTO_SCHEMA_CLASS` setting, and can be set to `None` to prevent this operation from being generated
- **request\_body** (`drf_yasg.openapi.Schema` or `drf_yasg.openapi.SchemaRef` or `rest_framework.serializers.Serializer` or `type[no_body]`) – custom request body which will be used as the schema property of a `Parameter` with in: 'body'.

A `Schema` or `SchemaRef` is not valid if this request consumes form-data, because `form` and `body` parameters are mutually exclusive in an `Operation`. If you need to set custom `form` parameters, you can use the `manual_parameters` argument.

If a `Serializer` class or instance is given, it will be automatically converted into a `Schema` used as a body `Parameter`, or into a list of form `Parameters`, as appropriate.

- **query\_serializer** (*rest\_framework.serializers.Serializer*) – if you use a *Serializer* to parse query parameters, you can pass it here and have *Parameter* objects be generated automatically from it.

If any *Field* on the serializer cannot be represented as a query *Parameter* (e.g. nested Serializers, file fields, ...), the schema generation will fail with an error.

Schema generation will also fail if the name of any *Field* on the *query\_serializer* conflicts with parameters generated by *filter\_backends* or *paginator*.

- **manual\_parameters** (*list[drf\_yasg.openapi.Parameter]*) – a list of manual parameters to override the automatically generated ones

*Parameters* are identified by their (name, in) combination, and any parameters given here will fully override automatically generated parameters if they collide.

It is an error to supply *form* parameters when the request does not consume form-data.

- **operation\_id** (*str*) – operation ID override; the operation ID must be unique across the whole API
- **operation\_description** (*str*) – operation description override
- **operation\_summary** (*str*) – operation summary string
- **security** (*list[dict]*) – security requirements override; used to specify which authentication mechanism is required to call this API; an empty list marks the endpoint as unauthenticated (i.e. removes all accepted authentication schemes), and *None* will inherit the top-level security requirements
- **deprecated** (*bool*) – deprecation status for operation
- **responses** (*dict[int or str, (drf\_yasg.openapi.Schema or drf\_yasg.openapi.SchemaRef or drf\_yasg.openapi.Response or str or rest\_framework.serializers.Serializer)]*) – a dict of documented manual responses keyed on response status code. If no success (2xx) response is given, one will automatically be generated from the request body and http method. If any 2xx response is given the automatic response is suppressed.
  - if a plain string is given as value, a *Response* with no body and that string as its description will be generated
  - if *None* is given as a value, the response is ignored; this is mainly useful for disabling default 2xx responses, i.e. `responses={200: None, 302: 'something'}`
  - if a *Schema*, *SchemaRef* is given, a *Response* with the schema as its body and an empty description will be generated
  - a *Serializer* class or instance will be converted into a *Schema* and treated as above
  - a *Response* object will be used as-is; however if its *schema* attribute is a *Serializer*, it will automatically be converted into a *Schema*
- **field\_inspectors** (*list[type[drf\_yasg.inspectors.FieldInspector]]*) – extra serializer and field inspectors; these will be tried before *ViewInspector.field\_inspectors* on the *inspectors.SwaggerAutoSchema*
- **filter\_inspectors** (*list[type[drf\_yasg.inspectors.FilterInspector]]*) – extra filter inspectors; these will be tried be-



for `ViewInspector.filter_inspectors` on the `inspectors.SwaggerAutoSchema`

- **paginator\_inspectors** (`list[type[drf_yasg.inspectors.PaginatorInspector]]`) – extra paginator inspectors; these will be tried before `ViewInspector.paginator_inspectors` on the `inspectors.SwaggerAutoSchema`
- **tags** (`list[str]`) – tags override
- **extra\_overrides** – extra values that will be saved into the overrides dict; these values will be available in the handling `inspectors.SwaggerAutoSchema` instance via `self.overrides`

`drf_yasg.utils.swagger_serializer_method(serializer_or_field)`

Decorates the method of a serializers.SerializerMethodField to hint as to how Swagger should be generated for this field.

**Parameters** `serializer_or_field` – Serializer/Field class or instance

**Returns**

`drf_yasg.utils.is_list_view(path, method, view)`

Check if the given path/method appears to represent a list view (as opposed to a detail/instance view).

**Parameters**

- **path** (`str`) – view path
- **method** (`str`) – http method
- **view** (`APIView`) – target view

**Return type** `bool`

`drf_yasg.utils.guess_response_status(method)`

`drf_yasg.utils.param_list_to_odict(parameters)`

Transform a list of `Parameter` objects into an `OrderedDict` keyed on the `(name, in_)` tuple of each parameter.

Raises an `AssertionError` if `parameters` contains duplicate parameters (by their name + in combination).

**Parameters** `parameters` (`list[drf_yasg.openapi.Parameter]`) – the list of parameters

**Returns** `parameters` keyed by `(name, in_)`

**Return type** `dict[(str,str),drf_yasg.openapi.Parameter]`

`drf_yasg.utils.merge_params(parameters, overrides)`

Merge `overrides` into `parameters`. This is the same as appending `overrides` to `parameters`, but any element of `parameters` whose `(name, in_)` tuple collides with an element in `overrides` is replaced by it.

Raises an `AssertionError` if either list contains duplicate parameters.

**Parameters**

- **parameters** (`list[drf_yasg.openapi.Parameter]`) – initial parameters
- **overrides** (`list[drf_yasg.openapi.Parameter]`) – overriding parameters

**Returns** merged list

**Return type** `list[drf_yasg.openapi.Parameter]`

`drf_yasg.utils.filter_none(obj)`

Remove `None` values from tuples, lists or dictionaries. Return other objects as-is.

**Parameters** `obj` – the object

**Returns** collection with None values removed

`drf_yasg.utils.force_serializer_instance(serializer)`

Force *serializer* into a `Serializer` instance. If it is not a `Serializer` class or instance, raises an assertion error.

**Parameters** `serializer` (`serializers.BaseSerializer` or `type[serializers.BaseSerializer]`) – serializer class or instance

**Returns** serializer instance

**Return type** `serializers.BaseSerializer`

`drf_yasg.utils.get_serializer_class(serializer)`

Given a `Serializer` class or instance, return the `Serializer` class. If *serializer* is not a `Serializer` class or instance, raises an assertion error.

**Parameters** `serializer` – serializer class or instance, or None

**Returns** serializer class

**Return type** `type[serializers.BaseSerializer]`

`drf_yasg.utils.get_object_classes(classes_or_instances, expected_base_class=None)`

Given a list of instances or class objects, return the list of their classes.

**Parameters**

- **`classes_or_instances`** (`list[type or object]`) – mixed list to parse
- **`expected_base_class`** (`type`) – if given, only subclasses or instances of this type will be returned

**Returns** list of classes

**Return type** list

`drf_yasg.utils.get_consumes(parser_classes)`

Extract consumes MIME types from a list of parser classes.

**Parameters** `parser_classes` (`list[rest_framework.parsers.BaseParser or type[rest_framework.parsers.BaseParser]]`) – parser classes

**Returns** MIME types for consumes

**Return type** list[str]

`drf_yasg.utils.get_produces(renderer_classes)`

Extract produces MIME types from a list of renderer classes.

**Parameters** `renderer_classes` (`list[rest_framework.renderers.BaseRenderer or type[rest_framework.renderers.BaseRenderer]]`) – renderer classes

**Returns** MIME types for produces

**Return type** list[str]

`drf_yasg.utils.decimal_as_float(field)`

Returns true if *field* is a django-rest-framework `DecimalField` and its `coerce_to_string` attribute or the `COERCE_DECIMAL_TO_STRING` setting is set to False.

**Return type** bool

`drf_yasg.utils.get_serializer_ref_name(serializer)`

Get *serializer*'s `ref_name` (or None for `ModelSerializer` if it is named 'NestedSerializer')

**Parameters** `serializer` – `Serializer` instance

**Returns** Serializer’s `ref_name` or `None` for inline serializer

**Return type** `str` or `None`

`drf_yasg.utils.force_real_str(s, encoding='utf-8', strings_only=False, errors='strict')`  
Force `s` into a `str` instance.

Fix for <https://github.com/axnsan12/drf-yasg/issues/159>

`drf_yasg.utils.field_value_to_representation(field, value)`  
Convert a python value related to a field (default, choices, etc.) into its OpenAPI-compatible representation.

**Parameters**

- **field** (`serializers.Field`) – field associated with the value
- **value** (`object`) – value

**Returns** the converted value

`drf_yasg.utils.get_field_default(field)`  
Get the default value for a field, converted to a JSON-compatible value while properly handling callables.

**Parameters** **field** – field instance

**Returns** default value

### 11.1.9 drf\_yasg.views

`drf_yasg.views.deferred_never_cache(view_func)`  
Decorator that adds headers to a response so that it will never be cached.

`drf_yasg.views.get_schema_view(info=None, url=None, patterns=None, urlconf=None, public=False, validators=None, generator_class=None, authentication_classes=None, permission_classes=None)`  
Create a `SchemaView` class with default renderers and generators.

**Parameters**

- **info** (`Info`) – information about the API; if omitted, defaults to `DEFAULT_INFO`
- **url** (`str`) – same as `OpenAPISchemaGenerator`
- **patterns** – same as `OpenAPISchemaGenerator`
- **urlconf** – same as `OpenAPISchemaGenerator`
- **public** (`bool`) – if `False`, includes only the endpoints that are accessible by the user viewing the schema
- **validators** (`list`) – a list of validator names to apply; the only allowed value is `ssv`, for now
- **generator\_class** (`type`) – schema generator class to use; should be a subclass of `OpenAPISchemaGenerator`
- **authentication\_classes** (`list`) – authentication classes for the schema view itself
- **permission\_classes** (`list`) – permission classes for the schema view itself

**Returns** `SchemaView` class

**Return type** `type[drf_yasg.views.SchemaView]`

**class** drf\_yasg.views.SchemaView(\*\*kwargs)

Bases: rest\_framework.views.APIView

Constructor. Called in the URLconf; can contain helpful extra keyword arguments, and other things.

**\_ignore\_model\_permissions = True**

**classmethod** apply\_cache(view, cache\_timeout, cache\_kwargs)

Override this method to customize how caching is applied to the view.

Arguments described in [as\\_cached\\_view\(\)](#).

**classmethod** as\_cached\_view(cache\_timeout=0, cache\_kwargs=None, \*\*initkwargs)

Calls .as\_view() and wraps the result in a cache\_page decorator. See <https://docs.djangoproject.com/en/dev/topics/cache/>

#### Parameters

- **cache\_timeout** (*int*) – same as cache\_page; set to 0 for no cache
- **cache\_kwargs** (*dict*) – dictionary of kwargs to be passed to cache\_page
- **initkwargs** – kwargs for .as\_view()

**Returns** a view instance

**authentication\_classes** = [`<class 'rest_framework.authentication.SessionAuthentication'>`]

**generator\_class**

alias of `drf_yasg.generators.OpenAPISchemaGenerator`

**get** (request, version="", format=None)

**permission\_classes** = [`<class 'rest_framework.permissions.AllowAny'>`]

**public** = False

**renderer\_classes** = (`<class 'drf_yasg.renderers.SwaggerYAMLRenderer'>`, `<class 'drf_yasg.renderers.JSONRenderer'>`)

**schema** = None

**classmethod** with\_ui(renderer='swagger', cache\_timeout=0, cache\_kwargs=None)

Instantiate this view with a Web UI renderer, optionally wrapped with cache\_page. See <https://docs.djangoproject.com/en/dev/topics/cache/>.

#### Parameters

- **renderer** (*str*) – UI renderer; allowed values are swagger, redoc
- **cache\_timeout** (*int*) – same as cache\_page; set to 0 for no cache
- **cache\_kwargs** (*dict*) – dictionary of kwargs to be passed to cache\_page

**Returns** a view instance

**classmethod** without\_ui(cache\_timeout=0, cache\_kwargs=None)

Instantiate this view with just JSON and YAML renderers, optionally wrapped with cache\_page. See <https://docs.djangoproject.com/en/dev/topics/cache/>.

#### Parameters

- **cache\_timeout** (*int*) – same as cache\_page; set to 0 for no cache
- **cache\_kwargs** (*dict*) – dictionary of kwargs to be passed to cache\_page

**Returns** a view instance

### **c**

`drf_yasg.codecs`, [57](#)

### **e**

`drf_yasg.errors`, [59](#)

### **g**

`drf_yasg.generators`, [59](#)

### **i**

`drf_yasg.inspectors`, [64](#)

### **m**

`drf_yasg.middleware`, [80](#)

### **o**

`drf_yasg.openapi`, [80](#)

### **r**

`drf_yasg.renderers`, [87](#)

### **u**

`drf_yasg.utils`, [89](#)

### **v**

`drf_yasg.views`, [93](#)



## Symbols

[\\_OpenAPICodec \(class in drf\\_yasg.codecs\), 57](#)  
[\\_Ref \(class in drf\\_yasg.openapi\), 85](#)  
[\\_SpecRenderer \(class in drf\\_yasg.renderers\), 87](#)  
[\\_UIRenderer \(class in drf\\_yasg.renderers\), 88](#)  
[\\_as\\_odict\(\) \(drf\\_yasg.openapi.SwaggerDict static method\), 81](#)  
[\\_check\\_scope\(\) \(drf\\_yasg.openapi.ReferenceResolver method\), 86](#)  
[\\_check\\_type\(\) \(in module drf\\_yasg.openapi\), 83](#)  
[\\_dump\\_dict\(\) \(drf\\_yasg.codecs.OpenAPICodec.Json method\), 58](#)  
[\\_dump\\_dict\(\) \(drf\\_yasg.codecs.OpenAPICodec.Yaml method\), 58](#)  
[\\_dump\\_dict\(\) \(drf\\_yasg.codecs.\\_OpenAPICodec method\), 58](#)  
[\\_get\\_partial\\_types\(\) \(drf\\_yasg.inspectors.FieldInspector method\), 66](#)  
[\\_get\\_request\\_body\\_override\(\) \(drf\\_yasg.inspectors.SwaggerAutoSchema method\), 77](#)  
[\\_has\\_ref\\_name\(\) \(drf\\_yasg.inspectors.InlineSerializerInspector method\), 71](#)  
[\\_ignore\\_model\\_permissions \(drf\\_yasg.views.SchemaView attribute\), 94](#)  
[\\_insert\\_extras\\_\\_\(\) \(drf\\_yasg.openapi.SwaggerDict method\), 81](#)  
[\\_prepend\\_inspector\\_overrides\(\) \(drf\\_yasg.inspectors.ViewInspector method\), 67](#)  
[\\_remove\\_read\\_only\(\) \(drf\\_yasg.openapi.Schema method\), 85](#)  
[\\_validate\\_flex\(\) \(in module drf\\_yasg.codecs\), 57](#)  
[\\_validate\\_swagger\\_spec\\_validator\(\) \(in module drf\\_yasg.codecs\), 57](#)

## A

[add\\_manual\\_fields\(\) \(drf\\_yasg.inspectors.FieldInspector method\), 66](#)  
[add\\_manual\\_parameters\(\) \(drf\\_yasg.inspectors.InlineSerializerInspector method\), 71](#)  
[add\\_manual\\_parameters\(\) \(drf\\_yasg.inspectors.SwaggerAutoSchema method\), 77](#)  
[apply\\_cache\(\) \(drf\\_yasg.views.SchemaView class method\), 94](#)  
[as\\_cached\\_view\(\) \(drf\\_yasg.views.SchemaView class method\), 94](#)  
[as\\_odict\(\) \(drf\\_yasg.openapi.SwaggerDict method\), 81](#)  
[authentication\\_classes \(drf\\_yasg.views.SchemaView attribute\), 94](#)

## B

[BaseInspector \(class in drf\\_yasg.inspectors\), 64](#)  
[body\\_methods \(drf\\_yasg.inspectors.ViewInspector attribute\), 67](#)

## C

[CamelCaseJSONFilter \(class in drf\\_yasg.inspectors\), 75](#)  
[camelize\\_schema\(\) \(drf\\_yasg.inspectors.CamelCaseJSONFilter method\), 75](#)  
[camelize\\_string\(\) \(drf\\_yasg.inspectors.CamelCaseJSONFilter method\), 75](#)  
[charset \(drf\\_yasg.renderers.\\_SpecRenderer attribute\), 87](#)  
[charset \(drf\\_yasg.renderers.\\_UIRenderer attribute\), 88](#)  
[ChoiceFieldInspector \(class in drf\\_yasg.inspectors\), 73](#)

`codec_class (drf_yasg.renderers._SpecRenderer attribute), 87`

`codec_class (drf_yasg.renderers.OpenAPIRenderer attribute), 87`

`codec_class (drf_yasg.renderers.SwaggerJSONRenderer attribute), 88`

`codec_class (drf_yasg.renderers.SwaggerYAMLRenderer attribute), 88`

`coerce_path() (drf_yasg.generators.OpenAPISchemaGenerator method), 61`

`common_path() (in module drf_yasg.generators), 59`

`Contact (class in drf_yasg.openapi), 81`

`coreapi_field_to_parameter() (drf_yasg.inspectors.CoreAPICompatInspector method), 70`

`CoreAPICompatInspector (class in drf_yasg.inspectors), 69`

`create_view() (drf_yasg.generators.OpenAPISchemaGenerator method), 61`

**D**

`decimal_as_float() (in module drf_yasg.utils), 92`

`default_mapping (drf_yasg.generators.OpenAPISchemaGenerator attribute), 60`

`deferred_never_cache() (in module drf_yasg.views), 93`

`determine_path_prefix() (drf_yasg.generators.OpenAPISchemaGenerator method), 62`

`DictFieldInspector (class in drf_yasg.inspectors), 74`

`DjangoRestResponsePagination (class in drf_yasg.inspectors), 70`

`drf_yasg.codecs (module), 57`

`drf_yasg.errors (module), 59`

`drf_yasg.generators (module), 59`

`drf_yasg.inspectors (module), 64`

`drf_yasg.middleware (module), 80`

`drf_yasg.openapi (module), 80`

`drf_yasg.renderers (module), 87`

`drf_yasg.utils (module), 89`

`drf_yasg.views (module), 93`

`DrfAPICompatInspector (class in drf_yasg.inspectors), 69`

**E**

`encode() (drf_yasg.codecs._OpenAPICodec method), 57`

`encode_error() (drf_yasg.codecs._OpenAPICodec method), 57`

`endpoint_enumerator_class (drf_yasg.generators.OpenAPISchemaGenerator attribute), 60`

`EndpointEnumerator (class in drf_yasg.generators), 59`

**F**

`field_inspectors (drf_yasg.inspectors.ViewInspector attribute), 68`

`field_to_swagger_object() (drf_yasg.inspectors.ChoiceFieldInspector method), 73`

`field_to_swagger_object() (drf_yasg.inspectors.DictFieldInspector method), 74`

`field_to_swagger_object() (drf_yasg.inspectors.FieldInspector method), 66`

`field_to_swagger_object() (drf_yasg.inspectors.FileFieldInspector method), 73`

`field_to_swagger_object() (drf_yasg.inspectors.HiddenFieldInspector method), 76`

`field_to_swagger_object() (drf_yasg.inspectors.InlineSerializerInspector method), 71`

`field_to_swagger_object() (drf_yasg.inspectors.JSONFieldInspector method), 74`

`field_to_swagger_object() (drf_yasg.inspectors.RelatedFieldInspector method), 72`

`field_to_swagger_object() (drf_yasg.inspectors.SerializerMethodFieldInspector method), 76`

`field_to_swagger_object() (drf_yasg.inspectors.SimpleFieldInspector method), 72`

`field_to_swagger_object() (drf_yasg.inspectors.StringDefaultFieldInspector method), 75`

`field_value_to_representation() (in module drf_yasg.utils), 93`

`FieldInspector (class in drf_yasg.inspectors), 66`

`FileFieldInspector (class in drf_yasg.inspectors), 73`

`filter_inspectors (drf_yasg.inspectors.ViewInspector attribute), 68`

`filter_none() (in module drf_yasg.utils), 91`

`FilterInspector (class in drf_yasg.inspectors), 65`

`fix_paginated_property() (drf_yasg.inspectors.DjangoRestResponsePagination method), 70`

`force_real_str() (in module drf_yasg.utils), 93`



`force_serializer_instance()` (in module `drf_yasg.utils`), 92  
`format` (`drf_yasg.renderers.OpenAPIRenderer` attribute), 87  
`format` (`drf_yasg.renderers.ReDocRenderer` attribute), 88  
`format` (`drf_yasg.renderers.SwaggerJSONRenderer` attribute), 88  
`format` (`drf_yasg.renderers.SwaggerUIRenderer` attribute), 88  
`format` (`drf_yasg.renderers.SwaggerYAMLEncoder` attribute), 88  
`FORMAT_BASE64` (in module `drf_yasg.openapi`), 80  
`FORMAT_BINARY` (in module `drf_yasg.openapi`), 80  
`FORMAT_DATE` (in module `drf_yasg.openapi`), 80  
`FORMAT_DATETIME` (in module `drf_yasg.openapi`), 80  
`FORMAT_DOUBLE` (in module `drf_yasg.openapi`), 80  
`FORMAT_EMAIL` (in module `drf_yasg.openapi`), 80  
`FORMAT_FLOAT` (in module `drf_yasg.openapi`), 80  
`FORMAT_INT32` (in module `drf_yasg.openapi`), 80  
`FORMAT_INT64` (in module `drf_yasg.openapi`), 80  
`FORMAT_IPV4` (in module `drf_yasg.openapi`), 80  
`FORMAT_IPV6` (in module `drf_yasg.openapi`), 80  
`FORMAT_PASSWORD` (in module `drf_yasg.openapi`), 80  
`FORMAT_SLUG` (in module `drf_yasg.openapi`), 80  
`FORMAT_URI` (in module `drf_yasg.openapi`), 80  
`FORMAT_UUID` (in module `drf_yasg.openapi`), 80

## G

`generate_swagger_object()` (`drf_yasg.codecs._OpenAPICodec` method), 58  
`generator_class` (`drf_yasg.views.SchemaView` attribute), 94  
`get()` (`drf_yasg.openapi.ReferenceResolver` method), 86  
`get()` (`drf_yasg.views.SchemaView` method), 94  
`get_api_endpoints()` (`drf_yasg.generators.EndpointEnumerator` method), 59  
`get_auth_urls()` (`drf_yasg.renderers._UIRenderer` method), 88  
`get_base_path()` (`drf_yasg.openapi.Swagger` class method), 82  
`get_consumes()` (`drf_yasg.inspectors.SwaggerAutoSchema` method), 77  
`get_consumes()` (in module `drf_yasg.utils`), 92  
`get_default_response_serializer()` (`drf_yasg.inspectors.SwaggerAutoSchema` method), 77  
`get_default_responses()` (`drf_yasg.inspectors.SwaggerAutoSchema` method), 77  
`get_endpoints()` (`drf_yasg.generators.OpenAPISchemaGenerator` method), 61  
`get_field_default()` (in module `drf_yasg.utils`), 93  
`get_filter_parameters()` (`drf_yasg.inspectors.CoreAPICompatInspector` method), 70  
`get_filter_parameters()` (`drf_yasg.inspectors.DrfAPICompatInspector` method), 69  
`get_filter_parameters()` (`drf_yasg.inspectors.FilterInspector` method), 65  
`get_filter_parameters()` (`drf_yasg.inspectors.ViewInspector` method), 68  
`get_oauth2_config()` (`drf_yasg.renderers._UIRenderer` method), 88  
`get_object_classes()` (in module `drf_yasg.utils`), 92  
`get_operation()` (`drf_yasg.generators.OpenAPISchemaGenerator` method), 62  
`get_operation()` (`drf_yasg.inspectors.SwaggerAutoSchema` method), 77  
`get_operation()` (`drf_yasg.inspectors.ViewInspector` method), 68  
`get_operation_id()` (`drf_yasg.inspectors.SwaggerAutoSchema` method), 77  
`get_operation_keys()` (`drf_yasg.generators.OpenAPISchemaGenerator` method), 61  
`get_overrides()` (`drf_yasg.generators.OpenAPISchemaGenerator` method), 63  
`get_paginated_response()` (`drf_yasg.inspectors.DjangoRestResponsePagination` method), 70  
`get_paginated_response()` (`drf_yasg.inspectors.PaginatorInspector` method), 65  
`get_paginated_response()` (`drf_yasg.inspectors.ViewInspector` method), 68  
`get_pagination_parameters()` (`drf_yasg.inspectors.ViewInspector` method), 68  
`get_paginator_parameters()` (`drf_yasg.inspectors.CoreAPICompatInspector` method), 70  
`get_paginator_parameters()` (`drf_yasg.inspectors.DrfAPICompatInspector` method), 69  
`get_paginator_parameters()` (`drf_yasg.inspectors.PaginatorInspector` method), 66

`get_parameter_name()`  
(*drf\_yasg.inspectors.InlineSerializerInspector* method), 71

`get_parser_classes()`  
(*drf\_yasg.inspectors.BaseInspector* method), 64

`get_path_from_regex()`  
(*drf\_yasg.generators.EndpointEnumerator* method), 59

`get_path_item()` (*drf\_yasg.generators.OpenAPISchemaGenerator* method), 63

`get_path_parameters()`  
(*drf\_yasg.generators.OpenAPISchemaGenerator* method), 63

`get_paths()` (*drf\_yasg.generators.OpenAPISchemaGenerator* method), 62

`get_paths_object()`  
(*drf\_yasg.generators.OpenAPISchemaGenerator* method), 62

`get_produces()` (*drf\_yasg.inspectors.SwaggerAutoSchema* method), 77

`get_produces()` (in module *drf\_yasg.utils*), 92

`get_property_name()`  
(*drf\_yasg.inspectors.InlineSerializerInspector* method), 71

`get_query_parameters()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 77

`get_query_serializer()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_redoc_settings()`  
(*drf\_yasg.renderers.ReDocRenderer* method), 89

`get_renderer_classes()`  
(*drf\_yasg.inspectors.BaseInspector* method), 64

`get_request_body_parameters()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_request_body_schema()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_request_form_parameters()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_request_parameters()`  
(*drf\_yasg.inspectors.InlineSerializerInspector* method), 71

`get_request_parameters()`  
(*drf\_yasg.inspectors.SerializerInspector* method), 67

`get_request_serializer()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_response_schemas()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_response_serializers()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_responses()` (*drf\_yasg.inspectors.SwaggerAutoSchema* method), 78

`get_schema()` (*drf\_yasg.generators.OpenAPISchemaGenerator* method), 60

`get_schema()` (*drf\_yasg.inspectors.InlineSerializerInspector* method), 72

`get_schema()` (*drf\_yasg.inspectors.SerializerInspector* method), 67

`get_schema_view()` (in module *drf\_yasg.views*), 93

`get_security()` (*drf\_yasg.inspectors.SwaggerAutoSchema* method), 79

`get_security_definitions()`  
(*drf\_yasg.generators.OpenAPISchemaGenerator* method), 60

`get_security_requirements()`  
(*drf\_yasg.generators.OpenAPISchemaGenerator* method), 60

`get_serializer_class()` (in module *drf\_yasg.utils*), 92

`get_serializer_ref_name()`  
(*drf\_yasg.inspectors.InlineSerializerInspector* method), 72

`get_serializer_ref_name()` (in module *drf\_yasg.utils*), 92

`get_summary_and_description()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 79

`get_swagger_ui_settings()`  
(*drf\_yasg.renderers.SwaggerUIRenderer* method), 88

`get_tags()` (*drf\_yasg.inspectors.SwaggerAutoSchema* method), 79

`get_view_serializer()`  
(*drf\_yasg.inspectors.SwaggerAutoSchema* method), 79

`getdefault()` (*drf\_yasg.openapi.ReferenceResolver* method), 87

`guess_response_status()` (in module *drf\_yasg.utils*), 91

## H

`has()` (*drf\_yasg.openapi.ReferenceResolver* method), 87

`has_list_response()`  
(*drf\_yasg.inspectors.ViewInspector* method), 68

HiddenFieldInspector (class in *media\_type* (*drf\_yasg.renderers.OpenAPIRenderer* attribute), 76

I

implicit\_body\_methods (*drf\_yasg.inspectors.ViewInspector* attribute), 68

implicit\_list\_response\_methods (*drf\_yasg.inspectors.ViewInspector* attribute), 68

IN\_BODY (in module *drf\_yasg.openapi*), 80

IN\_FORM (in module *drf\_yasg.openapi*), 80

IN\_HEADER (in module *drf\_yasg.openapi*), 80

IN\_PATH (in module *drf\_yasg.openapi*), 80

IN\_QUERY (in module *drf\_yasg.openapi*), 80

Info (class in *drf\_yasg.openapi*), 81

InlineSerializerInspector (class in *drf\_yasg.inspectors*), 71

is\_camel\_case() (*drf\_yasg.inspectors.CamelCaseJSONFilter* method), 75

is\_custom\_action() (in module *drf\_yasg.generators*), 59

is\_deprecated() (*drf\_yasg.inspectors.SwaggerAutoSchema* method), 79

is\_list\_view() (*drf\_yasg.inspectors.ViewInspector* method), 68

is\_list\_view() (in module *drf\_yasg.utils*), 91

Items (class in *drf\_yasg.openapi*), 83

J

JSONFieldInspector (class in *drf\_yasg.inspectors*), 74

K

keys() (*drf\_yasg.openapi.ReferenceResolver* method), 87

L

License (class in *drf\_yasg.openapi*), 81

M

make\_body\_parameter() (*drf\_yasg.inspectors.SwaggerAutoSchema* method), 79

make\_swagger\_name() (in module *drf\_yasg.openapi*), 80

media\_type (*drf\_yasg.codecs.\_OpenAPICodec* attribute), 57

media\_type (*drf\_yasg.codecs.OpenAPICodecJson* attribute), 58

media\_type (*drf\_yasg.codecs.OpenAPICodecYaml* attribute), 58

media\_type (*drf\_yasg.renderers.\_UIRenderer* attribute), 88

media\_type (*drf\_yasg.renderers.OpenAPIRenderer* attribute), 87

media\_type (*drf\_yasg.renderers.SwaggerJSONRenderer* attribute), 88

media\_type (*drf\_yasg.renderers.SwaggerYAMLRenderer* attribute), 88

merge\_params() (in module *drf\_yasg.utils*), 91

N

no\_body (class in *drf\_yasg.utils*), 89

NotHandled (in module *drf\_yasg.inspectors*), 64

O

OpenAPICodecJson (class in *drf\_yasg.codecs*), 58

OpenAPICodecYaml (class in *drf\_yasg.codecs*), 58

OpenAPIRenderer (class in *drf\_yasg.renderers*), 87

OpenAPISchemaGenerator (class in *drf\_yasg.generators*), 60

Operation (class in *drf\_yasg.openapi*), 83

OPERATION\_NAMES (*drf\_yasg.openapi.PathItem* attribute), 83

operations (*drf\_yasg.openapi.PathItem* attribute), 83

OPEN\_REF (*drf\_yasg.openapi.Schema* attribute), 85

P

paginator\_inspectors (*drf\_yasg.inspectors.ViewInspector* attribute), 68

PaginatorInspector (class in *drf\_yasg.inspectors*), 65

param\_list\_to\_odict() (in module *drf\_yasg.utils*), 91

param\_to\_schema() (*drf\_yasg.inspectors.DrfAPICompatInspector* method), 69

Parameter (class in *drf\_yasg.openapi*), 84

PathItem (class in *drf\_yasg.openapi*), 82

Paths (class in *drf\_yasg.openapi*), 82

permission\_classes (*drf\_yasg.views.SchemaView* attribute), 94

probe\_field\_inspectors() (*drf\_yasg.inspectors.FieldInspector* method), 67

probe\_inspectors() (*drf\_yasg.inspectors.BaseInspector* method), 64

process\_exception() (*drf\_yasg.middleware.SwaggerExceptionMiddleware* method), 80

process\_result() (*drf\_yasg.inspectors.BaseInspector* method), 64

process\_result() (*drf\_yasg.inspectors.CamelCaseJSONFilter* method), 75

public (*drf\_yasg.views.SchemaView* attribute), 94

## R

`RecursiveFieldInspector` (class in `drf_yasg.inspectors`), 72

`ReDocOldRenderer` (class in `drf_yasg.renderers`), 89

`ReDocRenderer` (class in `drf_yasg.renderers`), 88

`ref_name_re` (`drf_yasg.openapi._Ref` attribute), 85

`reference_resolver_class` (`drf_yasg.generators.OpenAPISchemaGenerator` attribute), 60

`ReferenceResolver` (class in `drf_yasg.openapi`), 86

`ReferencingSerializerInspector` (class in `drf_yasg.inspectors`), 72

`RelatedFieldInspector` (class in `drf_yasg.inspectors`), 72

`render()` (`drf_yasg.renderers._SpecRenderer` method), 87

`render()` (`drf_yasg.renderers._UIRenderer` method), 88

`renderer_classes` (`drf_yasg.views.SchemaView` attribute), 94

`replace_version()` (`drf_yasg.generators.EndpointEnumerator` method), 59

`resolve()` (`drf_yasg.openapi._Ref` method), 85

`resolve_ref()` (in module `drf_yasg.openapi`), 85

`resolve_url()` (`drf_yasg.renderers._UIRenderer` method), 88

`Response` (class in `drf_yasg.openapi`), 86

`Responses` (class in `drf_yasg.openapi`), 85

## S

`Schema` (class in `drf_yasg.openapi`), 84

`schema` (`drf_yasg.views.SchemaView` attribute), 94

`SCHEMA_DEFINITIONS` (in module `drf_yasg.openapi`), 80

`SchemaRef` (class in `drf_yasg.openapi`), 85

`SchemaView` (class in `drf_yasg.views`), 93

`scopes` (`drf_yasg.openapi.ReferenceResolver` attribute), 87

`serializer_to_parameters()` (`drf_yasg.inspectors.ViewInspector` method), 68

`serializer_to_schema()` (`drf_yasg.inspectors.ViewInspector` method), 69

`SerializerInspector` (class in `drf_yasg.inspectors`), 67

`SerializerMethodFieldInspector` (class in `drf_yasg.inspectors`), 76

`set()` (`drf_yasg.openapi.ReferenceResolver` method), 86

`set_context()` (`drf_yasg.renderers._UIRenderer` method), 88

`set_context()` (`drf_yasg.renderers.ReDocRenderer` method), 88

`set_context()` (`drf_yasg.renderers.SwaggerUIRenderer` method), 88

`setdefault()` (`drf_yasg.openapi.ReferenceResolver` method), 86

`should_filter()` (`drf_yasg.inspectors.ViewInspector` method), 69

`should_include_endpoint()` (`drf_yasg.generators.EndpointEnumerator` method), 59

`should_include_endpoint()` (`drf_yasg.generators.OpenAPISchemaGenerator` method), 62

`should_page()` (`drf_yasg.inspectors.ViewInspector` method), 69

`SimpleFieldInspector` (class in `drf_yasg.inspectors`), 72

`split_summary_from_description()` (`drf_yasg.inspectors.SwaggerAutoSchema` method), 79

`StringDefaultFieldInspector` (class in `drf_yasg.inspectors`), 75

`Swagger` (class in `drf_yasg.openapi`), 82

`swagger_auto_schema()` (in module `drf_yasg.utils`), 89

`swagger_serializer_method()` (in module `drf_yasg.utils`), 91

`SwaggerAutoSchema` (class in `drf_yasg.inspectors`), 77

`SwaggerDict` (class in `drf_yasg.openapi`), 81

`SwaggerError`, 59

`SwaggerExceptionMiddleware` (class in `drf_yasg.middleware`), 80

`SwaggerGenerationError`, 59

`SwaggerJSONRenderer` (class in `drf_yasg.renderers`), 88

`SwaggerUIRenderer` (class in `drf_yasg.renderers`), 88

`SwaggerValidationError`, 59

`SwaggerYAMLRenderer` (class in `drf_yasg.renderers`), 88

## T

`template` (`drf_yasg.renderers._UIRenderer` attribute), 88

`template` (`drf_yasg.renderers.ReDocOldRenderer` attribute), 89

`template` (`drf_yasg.renderers.ReDocRenderer` attribute), 88

`template` (`drf_yasg.renderers.SwaggerUIRenderer` attribute), 88

`TYPE_ARRAY` (in module `drf_yasg.openapi`), 80

`TYPE_BOOLEAN` (in module `drf_yasg.openapi`), 80

`TYPE_FILE` (in module `drf_yasg.openapi`), 80  
`TYPE_INTEGER` (in module `drf_yasg.openapi`), 80  
`TYPE_NUMBER` (in module `drf_yasg.openapi`), 80  
`TYPE_OBJECT` (in module `drf_yasg.openapi`), 80  
`TYPE_STRING` (in module `drf_yasg.openapi`), 80

## U

`unescape()` (`drf_yasg.generators.EndpointEnumerator` method), 59  
`unescape_path()` (`drf_yasg.generators.EndpointEnumerator` method), 59  
`unset` (class in `drf_yasg.utils`), 89  
`url` (`drf_yasg.generators.OpenAPISchemaGenerator` attribute), 60  
`use_definitions` (`drf_yasg.inspectors.InlineSerializerInspector` attribute), 72  
`use_definitions` (`drf_yasg.inspectors.ReferenceSerializerInspector` attribute), 72

## V

`validators` (`drf_yasg.codecs._OpenAPICodec` attribute), 57  
`validators` (`drf_yasg.renderers._SpecRenderer` attribute), 87  
`VALIDATORS` (in module `drf_yasg.codecs`), 57  
`ViewInspector` (class in `drf_yasg.inspectors`), 67

## W

`with_scope()` (`drf_yasg.openapi.ReferenceResolver` method), 86  
`with_ui()` (`drf_yasg.views.SchemaView` class method), 94  
`with_validators()` (`drf_yasg.renderers._SpecRenderer` class method), 87  
`without_ui()` (`drf_yasg.views.SchemaView` class method), 94

## Y

`yaml_sane_dump()` (in module `drf_yasg.codecs`), 58  
`yaml_sane_load()` (in module `drf_yasg.codecs`), 58